

Transport


UA 1398
Easydek Coaming Rail
Kg/m: 1.243
P: 250
OAD: 63 x 33.5
Fits: 1399

UA 1399
Easydek Flooring
Kg/m: 1.621
P: 581
OAD: 179.5 x 28.5

UA 1400 (MR)
Side Rail
Kg/m: 1.670
P: 490
OAD: 102 x 61

UA 3328 (MR)
Coaming Rail
Kg/m: 1.811
P: 452
OAD: 98 x 65

UA 3493 (MR)
Decking
Kg/m: 1.667
P: 491
OAD: 130 x 66.5

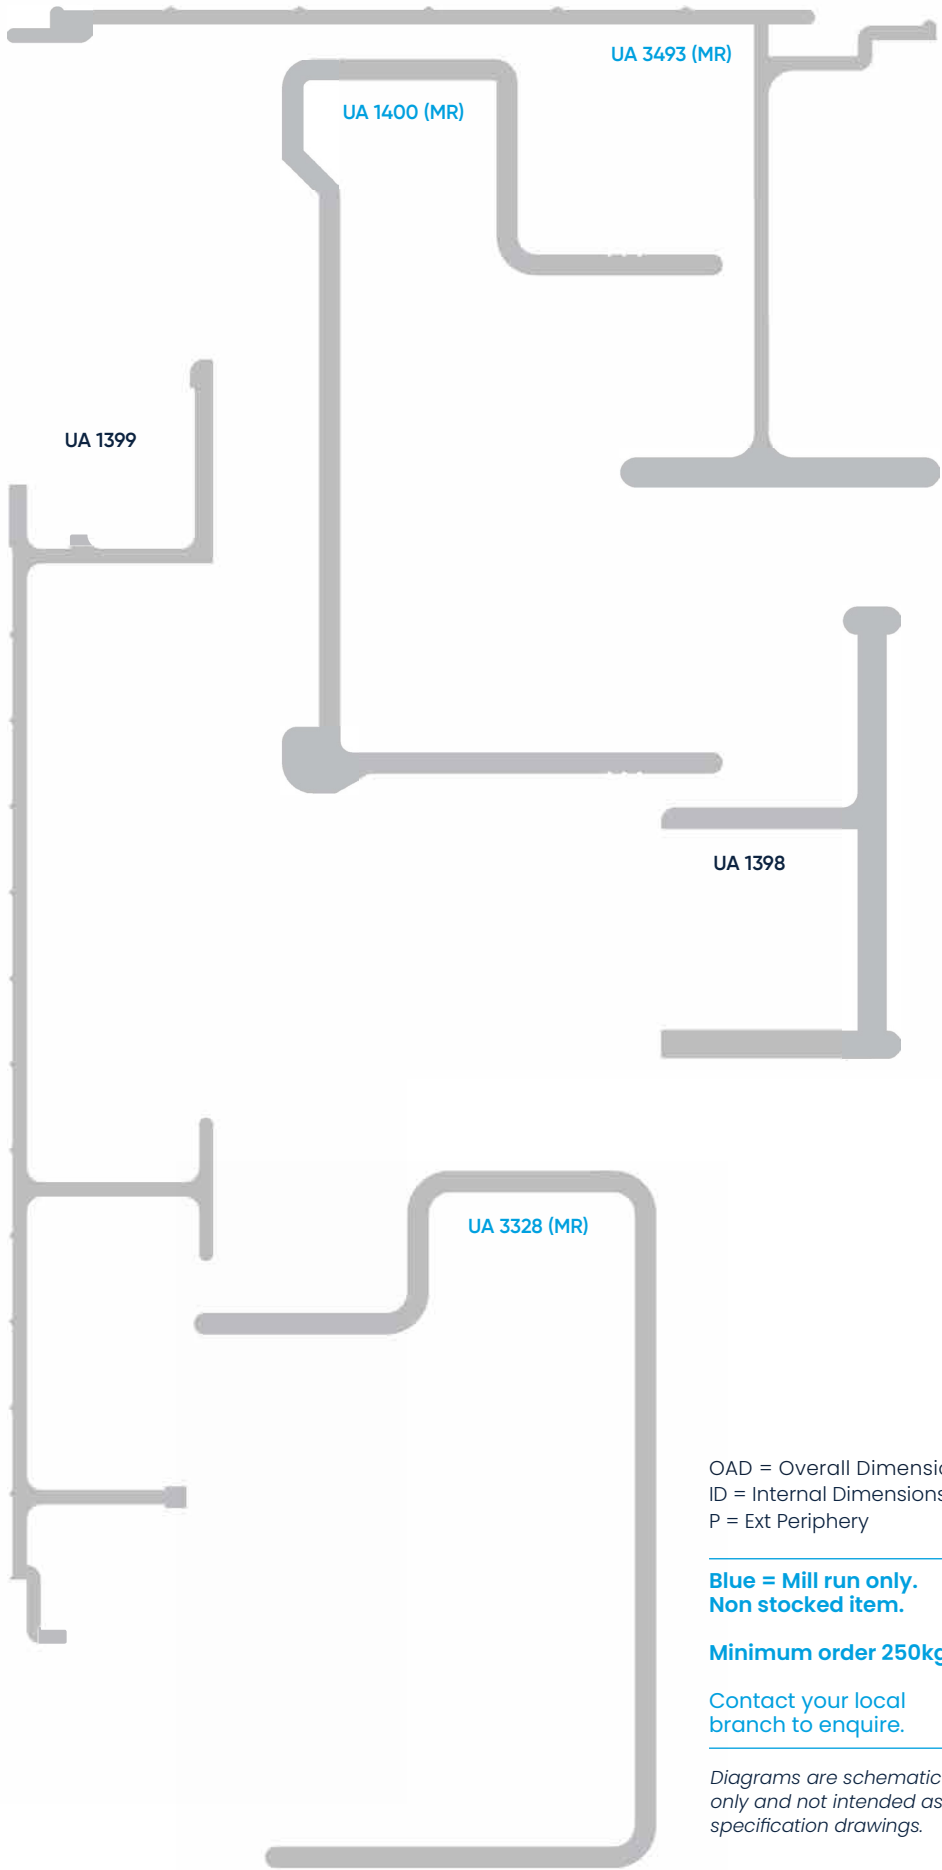

OAD = Overall Dimensions
ID = Internal Dimensions
P = Ext Periphery

**Blue = Mill run only.
Non stocked item.**

Minimum order 250kg.

**Contact your local
branch to enquire.**

*Diagrams are schematic
only and not intended as
specification drawings.*

Transport (Continued)

UA 1397
Easydek Side Cap
Kg/m: 0.521
P: 169
OAD: 45 x 22

UA 1405 (MR)
Hollow Plank
Kg/m: 1.409
P: 268
OAD: 93 x 25.5

UA 4626 (MR)
Grate Punched
Kg/m: 2.788
P: 840
OAD: 228.6 x 26



UA 6567 (MR)
Side Rail
Kg/m: 0.860
P: 163
OAD: 75 x 15

UA 661 I (MR)
Decking
Kg/m: 1.971
P: 611
OAD: 229.2 x 26

UA 4626 (MR)

UA 6611 (MR)

UA 1405 (MR)

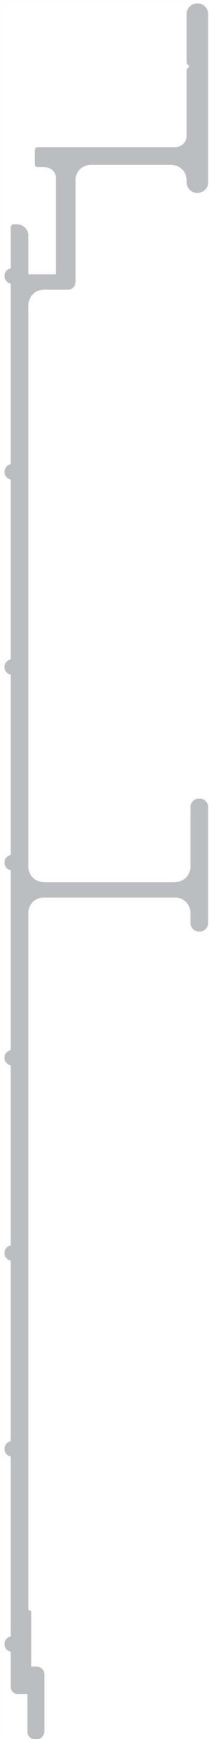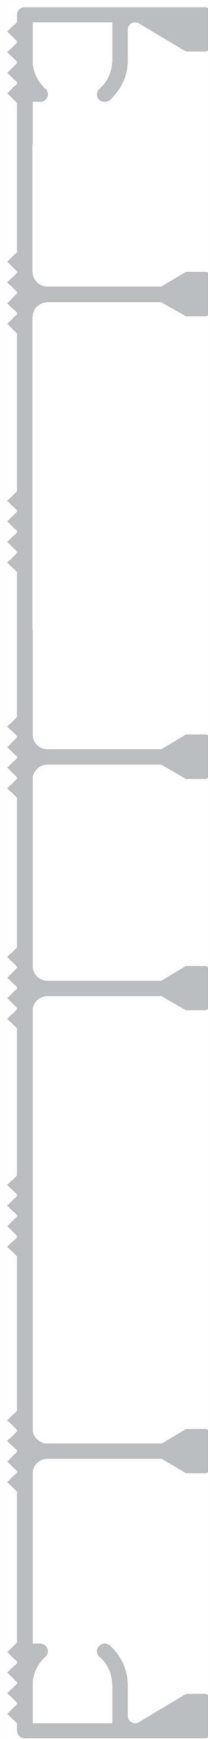

UA 1397

UA 6567 (MR)



OAD = Overall Dimensions
ID = Internal Dimensions
P = Ext Periphery

**Blue = Mill run only.
Non stocked item.**

Minimum order 250kg.


**Contact your local
branch to enquire.**

*Diagrams are schematic
only and not intended as
specification drawings.*



Transport (Continued)

- UA 1494**
Tray Side Cap
Kg/m: 1.202
P: 287
OAD: 34.93 x 63.5
- UA 1510 (MR)**
Scalloped Plank
Kg/m: 1.409
P: 421
OAD: 190.5 x 9.53
- UA 1581 (MR)**
Truck Side Board
Kg/m: 2.172
P: 647
OAD: 225 x 25
- UA 1584 (MR)**
Truck Side Rail
Kg/m: 1.521
P: 455
OAD: 136 x 50

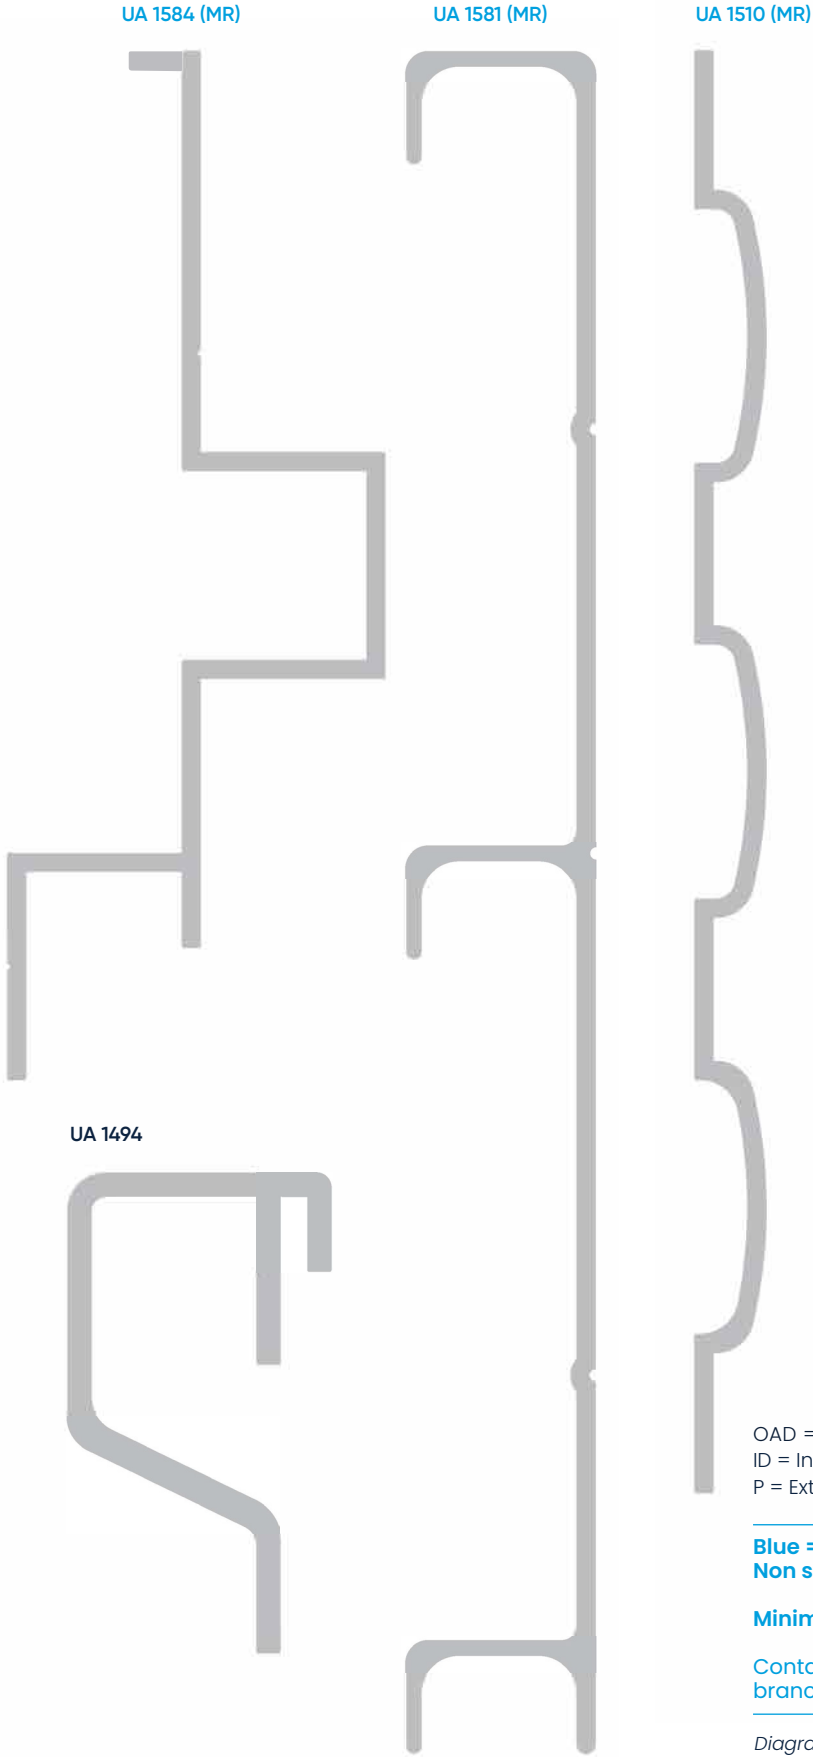

OAD = Overall Dimensions
ID = Internal Dimensions
P = Ext Periphery


**Blue = Mill run only.
Non stocked item.**
Minimum order 250kg.

Contact your local
branch to enquire.

Diagrams are schematic
only and not intended as
specification drawings.

Transport (Continued)

- UA 1402**
Plank
Kg/m: 2.060
P: 678
OAD: 226 x 22
- UA 1403**
Plank
Kg/m: 1.530
P: 572
OAD: 229.5 x 12.5
- UA 5183**
Side Board
Kg/m: 2.461
P: 732
OAD: 250 x 33

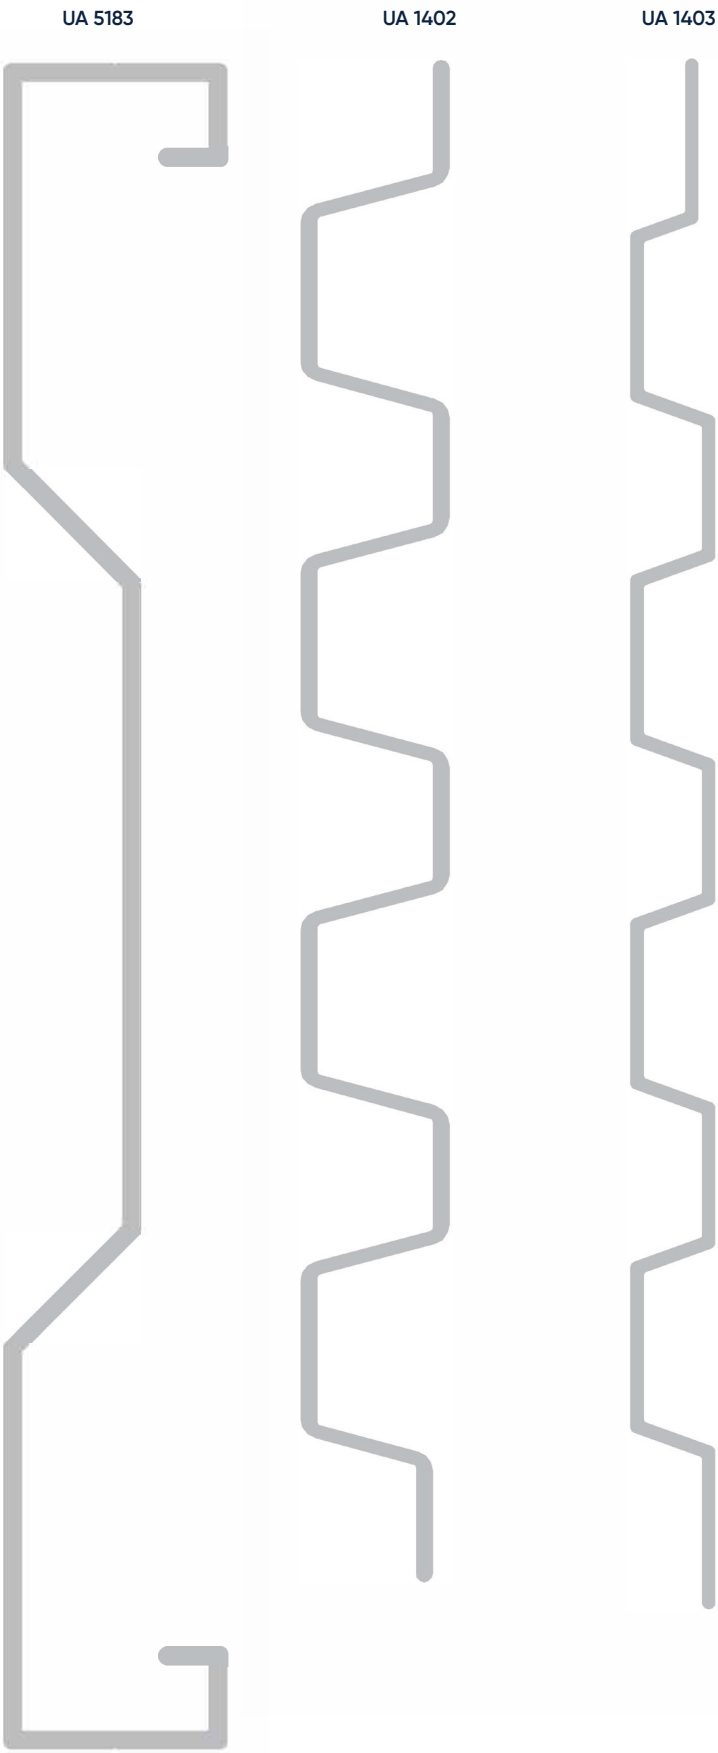

OAD = Overall Dimensions
ID = Internal Dimensions
P = Ext Periphery

**Blue = Mill run only.
Non stocked item.**
Minimum order 250kg.

Contact your local
branch to enquire.

Diagrams are schematic
only and not intended as
specification drawings.

Transport (Continued)

UA 1396
Cant Rail
Kg/m: 1.966
P: 558
OAD: 152.5 x 79.4
Cast Corner UC: 1396


UA 1509
Cant with Drip Rail
Kg/m: 2.401
P: 646
OAD: 153.97 x 136.62

UA 1511 (MR)
Cant Rail
Kg/m: 0.629
P: 208
OAD: 73.28 x 56.55

UA 1583 (MR)
Cant with Drip Rail
Kg/m: 1.615
P: 479
OAD: 109.33 x 90

UA 2741 (MR)
Cant Rail
Kg/m: 1.806
P: 451
OAD: 106 x 106

UA 6388 (MR)
Side Rail
Kg/m: 1.022
P: 243
OAD: 101.43 x 45.34

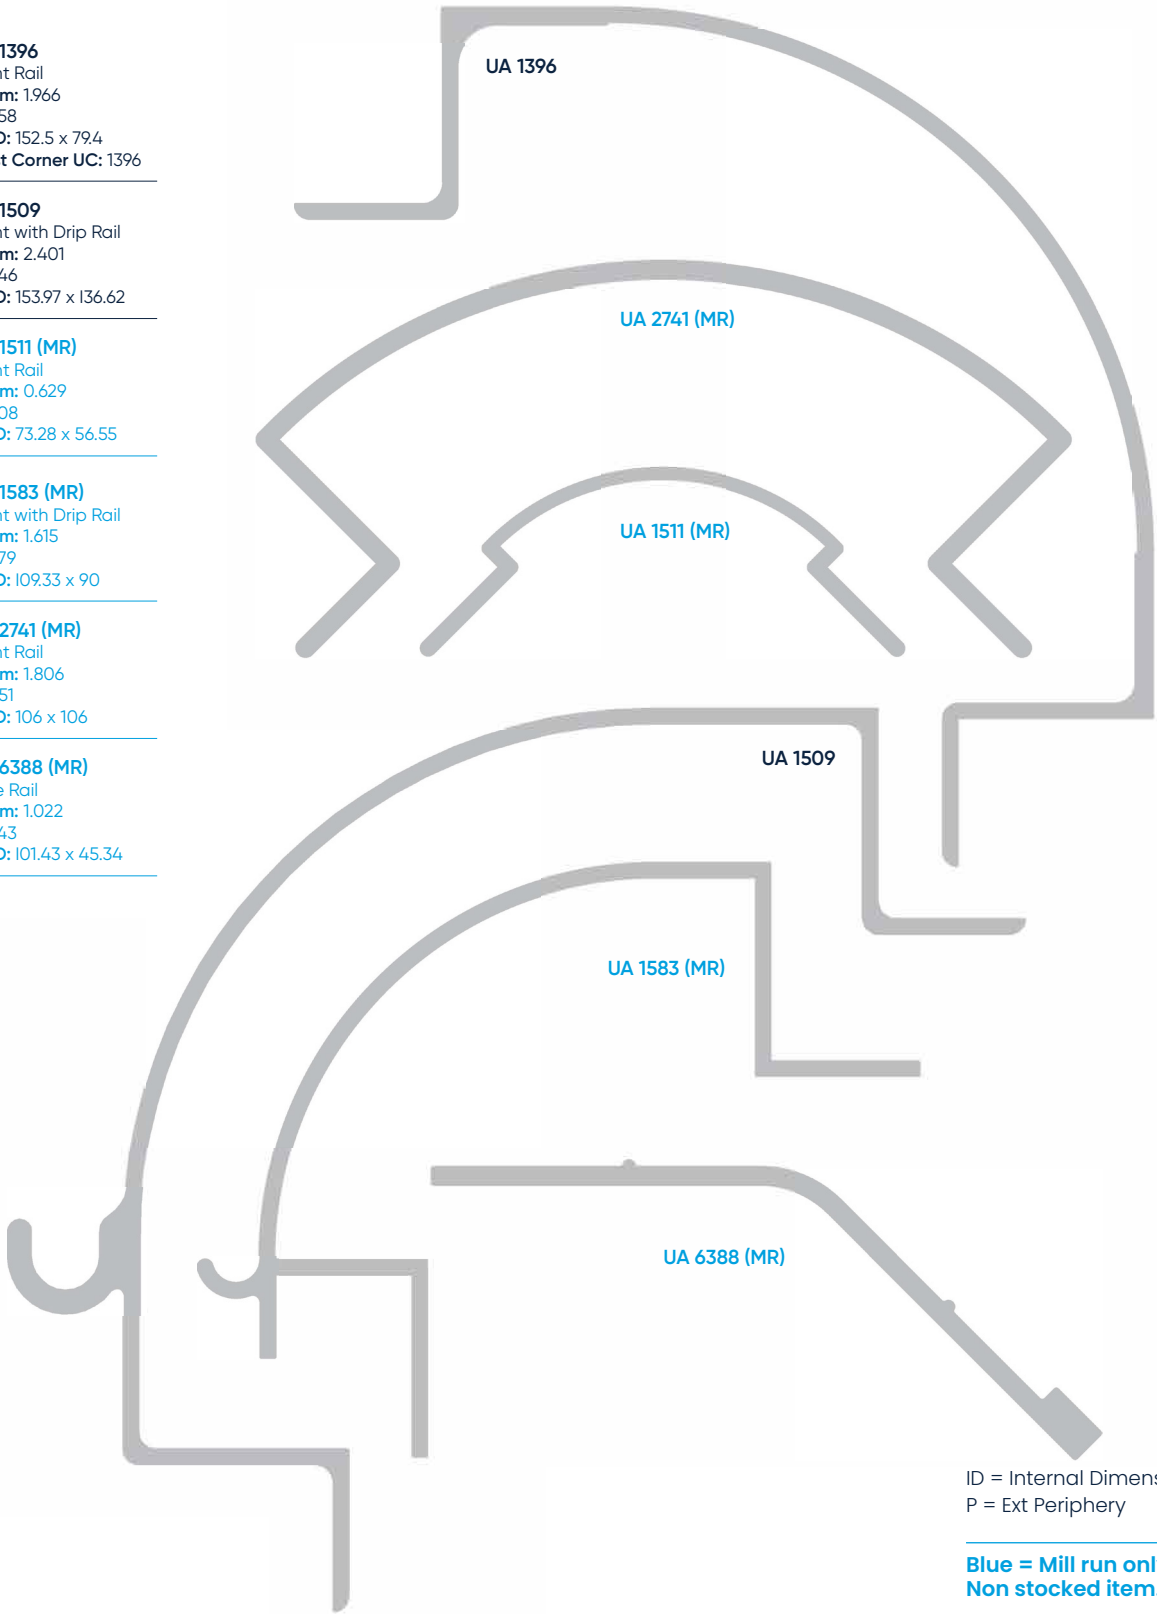

ID = Internal Dimensions
P = Ext Periphery

Blue = Mill run only.
Non stocked item.
Minimum order 250kg.

Contact your local
branch to enquire.

Diagrams are schematic
only and not intended as
specification drawings.

Transport (Continued)


UA 1393 (MR)
Bus Window Bottom
Kg/m: 0.457
P: 175
OAD: 34.5 x 28

UA 1395 (MR)
Bus Window Top
Kg/m: 0.387
P: 144
OAD: 26 x 22

UA 1404
Roller Shutter
Kg/m: 0.394
P: 162
OAD: 58.85 x 11.3

UA 1573
Roller Glide Channel
Kg/m: 0.273
P: 148
OAD: 25 x 25

UA 6784
P-Section
Kg/m: 1.062
P: 169
OAD: 60 x 30

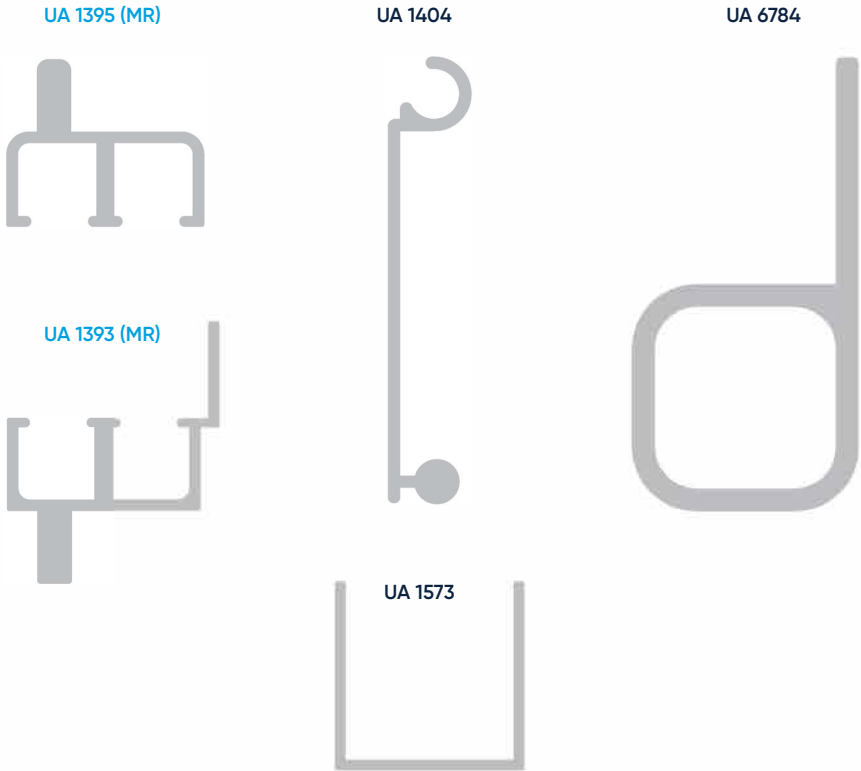

Fits 1404
Each end of every second shutter
Minimum inside radius bend of 150mm

OAD = Overall Dimensions
ID = Internal Dimensions
P = Ext Periphery


Blue = Mill run only.
Non stocked item.
Minimum order 250kg.

Contact your local
branch to enquire.

Diagrams are schematic
only and not intended as
specification drawings.

Transport (Continued)

- UA 2463 (MR)
Channel
Kg/m: 3.056
P: 336
OAD: 100 x 50
- UA 5006
Coaming Rail
Kg/m: 7.173
P: 914
OAD: 215.9 x 119.4
- UA 5275
Sub Frame
Kg/m: 13.851
P: 807
OAD: 232.6 x 152.4

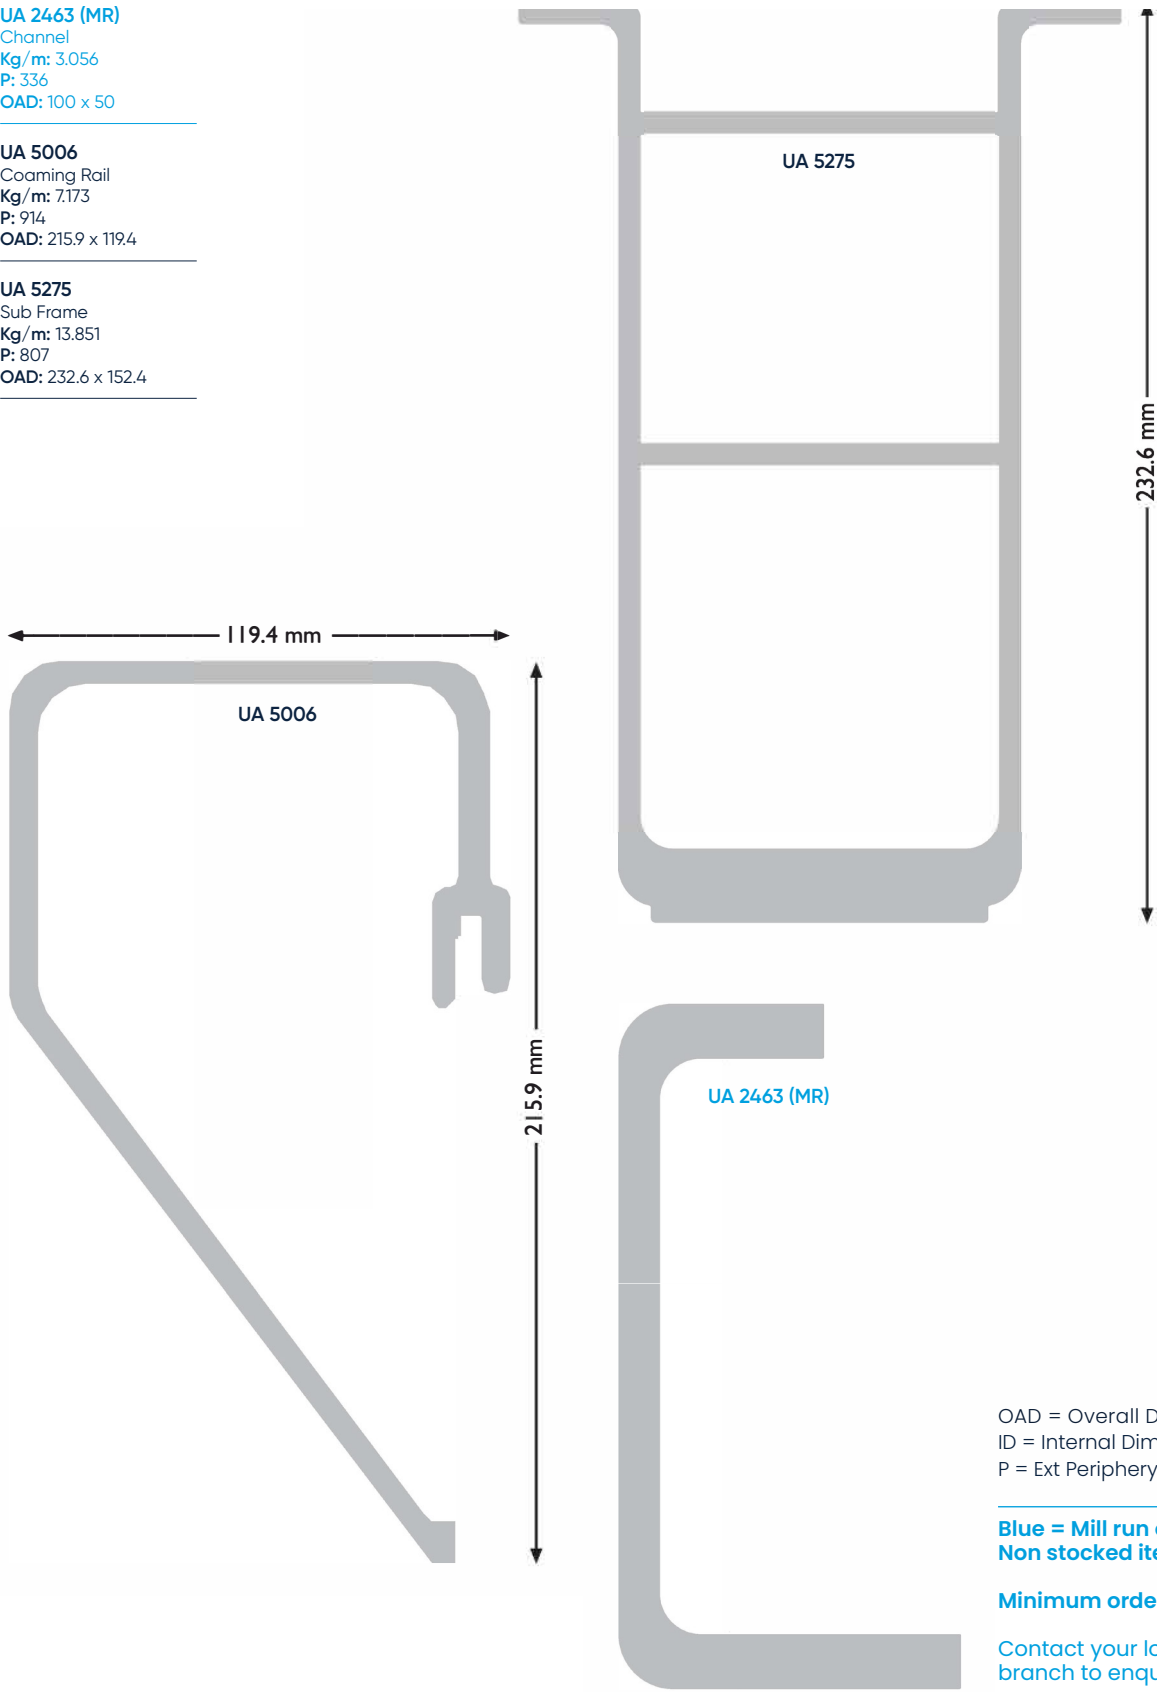

OAD = Overall Dimensions
ID = Internal Dimensions
P = Ext Periphery


Blue = Mill run only.
Non stocked item.
Minimum order 250kg.

Contact your local
branch to enquire.

Diagrams are schematic
only and not intended as
specification drawings.

Transport (Continued)

- UA 4394 (MR)
Chassis Runner Cap
Kg/m: 4.599
P: 349
OAD: 90 x 50
- UA 4395 (MR)
Chassis Runner
Kg/m: 6.132
P: 473
OAD: 130 x 110
- UA 6153 (MR)
Side Rail
Kg/m: 3.318
P: 445
OAD: 125 x 125
- UA4711 (MR)
Top Hat
Kg/m: 1.389
P: 366
OAD: 140 x 34.9

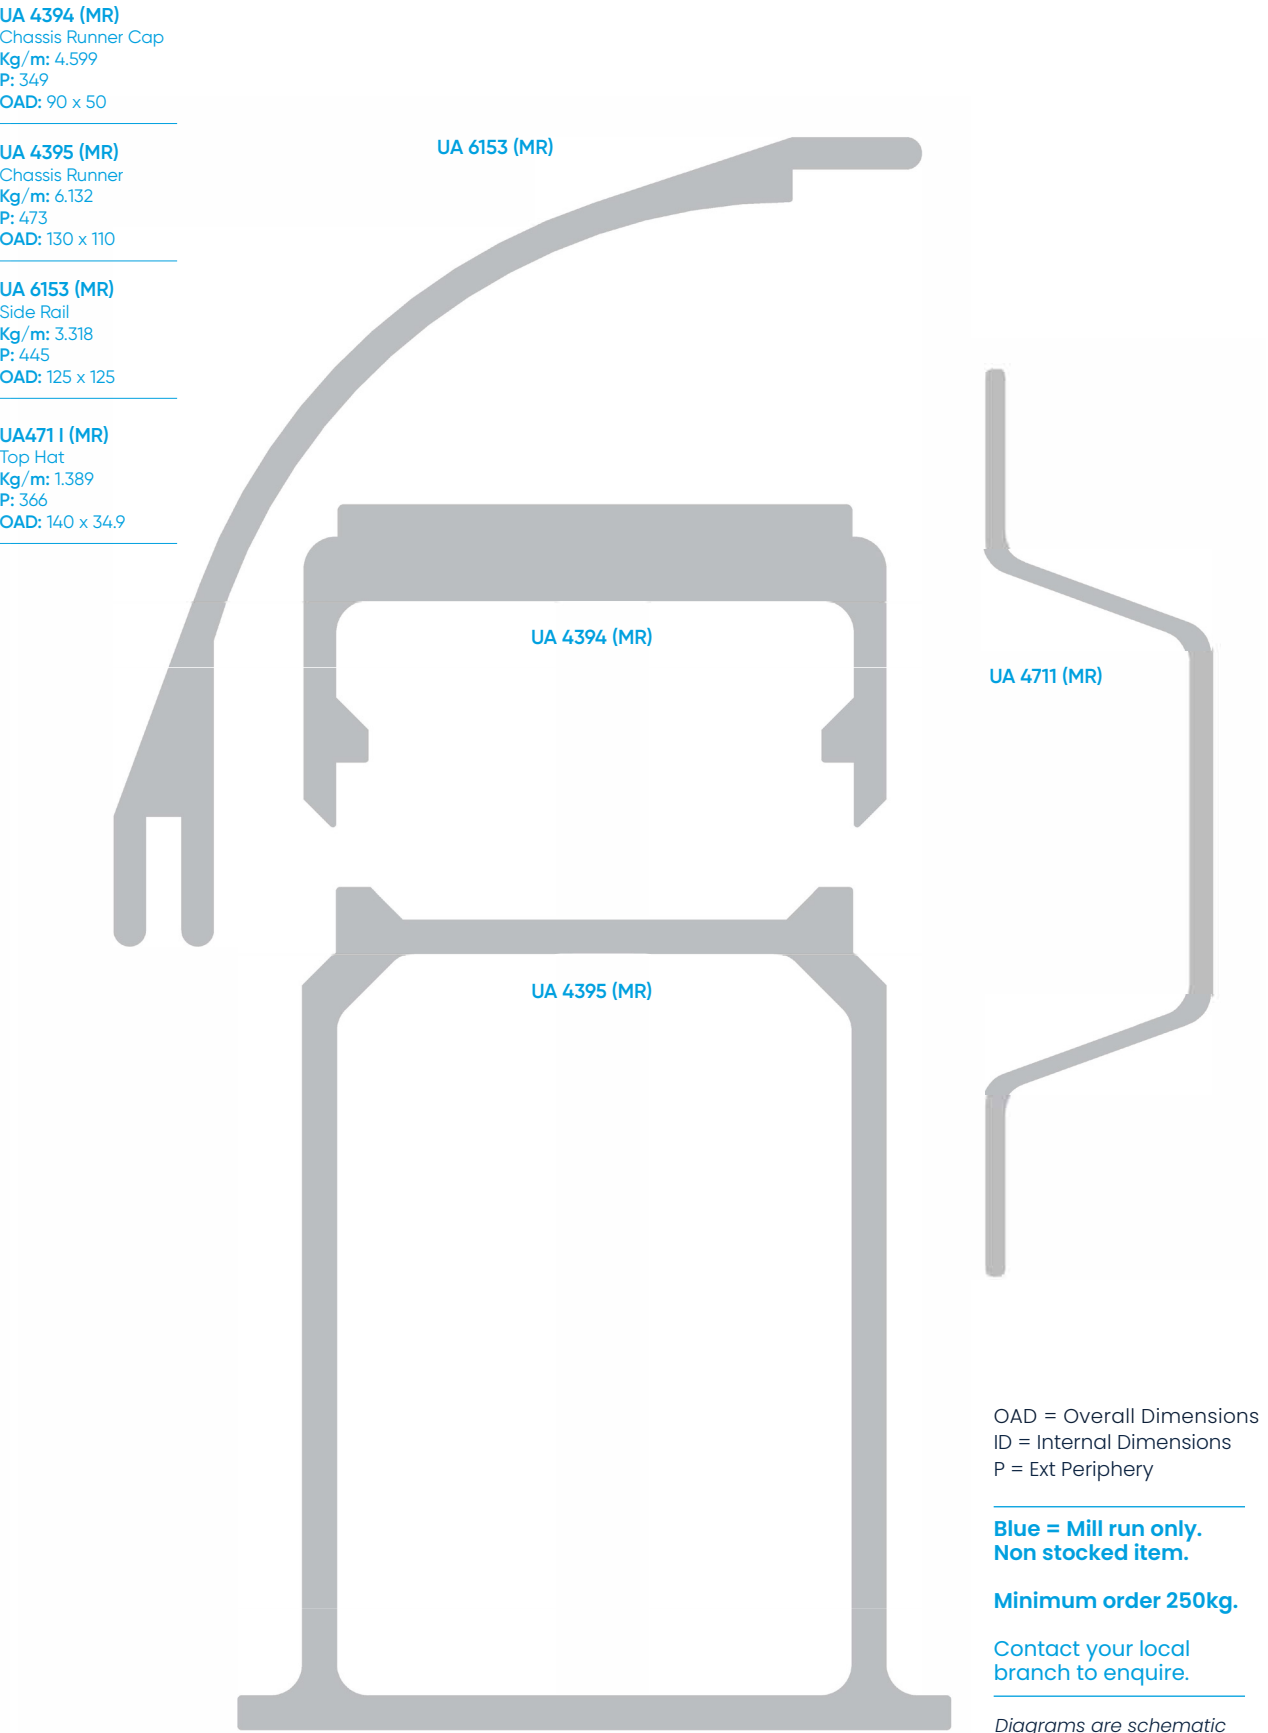

OAD = Overall Dimensions
ID = Internal Dimensions
P = Ext Periphery

Blue = Mill run only.
Non stocked item.
Minimum order 250kg.


Contact your local
branch to enquire.

Diagrams are schematic
only and not intended as
specification drawings.

Transport (Continued)

UA 5814 (MR)
Tipper Sub Frame
Kg/m: 9.596
P: 555
OAD: 179 x 106

UA 6892 (MR)
Channel
Kg/m: 3.777
P: 544
OAD: 100 x 75

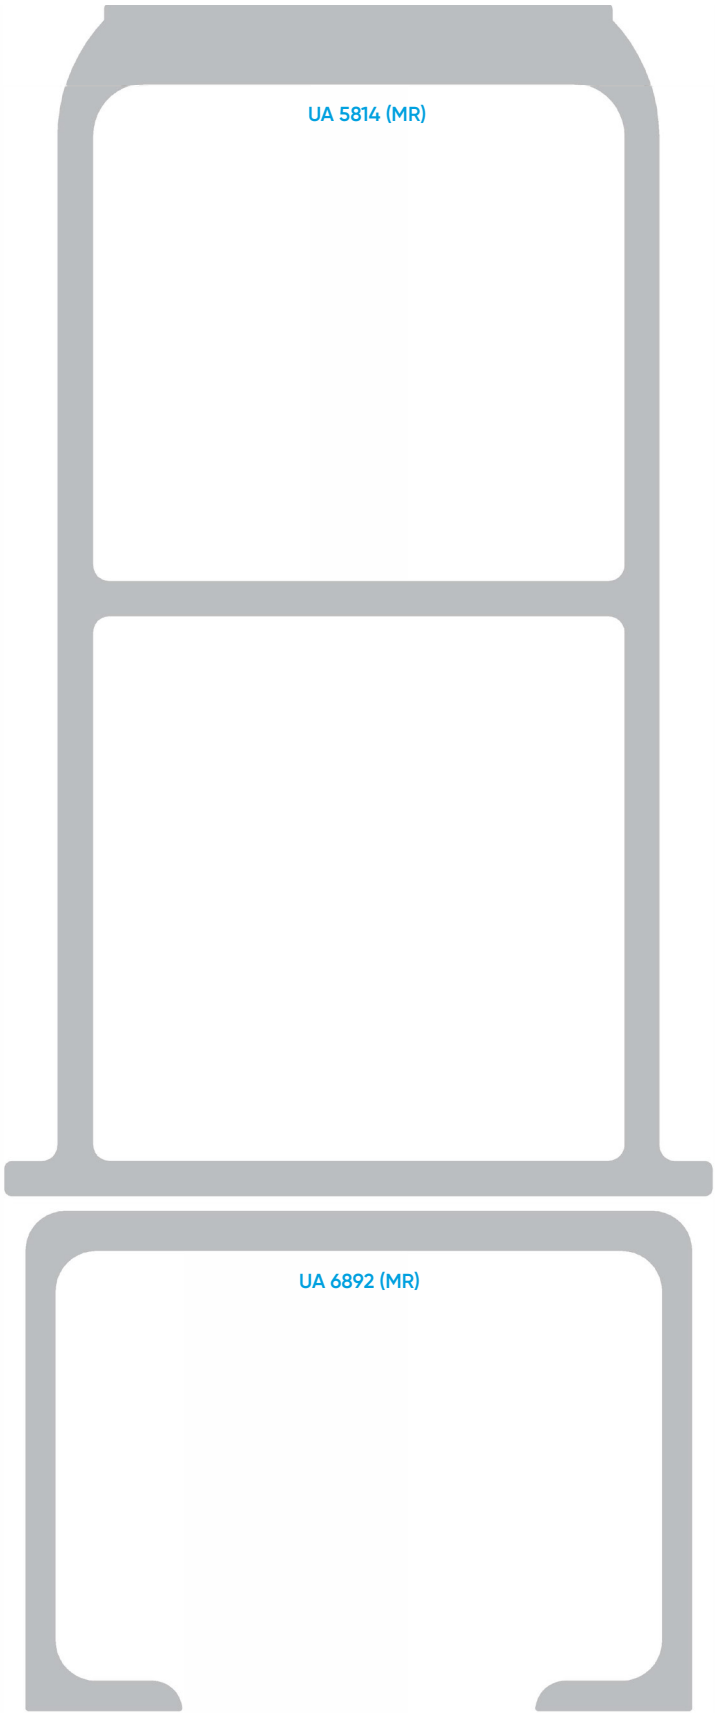

OAD = Overall Dimensions
ID = Internal Dimensions
P = Ext Periphery

**Blue = Mill run only.
Non stocked item.**

Minimum order 250kg.

**Contact your local
branch to enquire.**

*Diagrams are schematic
only and not intended as
specification drawings.*