

Flat Products

Standard Sheet	1
Coloured Sheet	4
Patterned Sheet	5
Special Finishes Sheet	6
Woven Wire Mesh	7
Welded Wire Mesh	10
Perforated Mesh	12
Plate	16
Coil	19
Tread / Tear Plates	21
Profiling and Polishing Service	22
Laser Cutting Services	23
Plasma Cutting Services	24
Polishing Service	24
Coil Slitting & Cut-to-length Service	25
Sheet Metal Standard Sizing	25
Surface Finishes	32


Standard Sheet

Grades: 304, 304L, 316L, 430, 2205, 253MA

Finishes: 2B, BA, No. 4, 2E, Pattern

Unit of Supply: Each

Certification: Acc. to ASTM A240/A480



SSS

Product Code	Grade	Finish	Product Size (mm)	Description	Weight Ea (kg)
G304 – 2B					
SSS045G3042B+09152438	G304	2B	0.45mm x 0915 x 2438	SHEET G304 2B ASTM A240/A480	8.03
SSS045G3042B+12192438	G304	2B	0.45mm x 1219 x 2438	SHEET G304 2B ASTM A240/A480	10.69
SSS055G3042B+09152438	G304	2B	0.55mm x 0915 x 2438	SHEET G304 2B ASTM A240/A480	9.82
SSS055G3042B+12192438	G304	2B	0.55mm x 1219 x 2438	SHEET G304 2B ASTM A240/A480	13.08
SSS070G3042B+12192438	G304	2B	0.70mm x 1219 x 2438	SHEET G304 2B ASTM A240/A480	16.64
SSS090G3042B+12192438	G304	2B	0.90mm x 1219 x 2438	SHEET G304 2B ASTM A240/A480	21.40
SSS200G3042B+12192438	G304	2B	2.00mm x 1219 x 2438	SHEET G304 2B ASTM A240/A480	47.55
SSS070G3042BP+12192438	G304	2B LPE	0.70mm x 1219 x 2438	SHEET G304 2B LPE ASTM A240/A480	16.64
SSS090G3042BP+12192438	G304	2B LPE	0.90mm x 1219 x 2438	SHEET G304 2B LPE ASTM A240/A480	21.40
SSS090G3042BP+15243048N	G304	2B LPE	0.90mm x 1524 x 3048	SHEET G304 2B LPE ASTM A240/A480	32.40
SSS120G3042BP+09152438	G304	2B LPE	1.20mm x 0915 x 2438	SHEET G304 2B LPE ASTM A240/A480	21.42
SSS120G3042BP+09153048	G304	2B LPE	1.20mm x 0915 x 3048	SHEET G304 2B LPE ASTM A240/A480	26.77
SSS120G3042BP+09153658	G304	2B LPE	1.20mm x 0915 x 3658	SHEET G304 2B LPE ASTM A240/A480	32.13
SSS120G3042BP+09154500	G304	2B LPE	1.20mm x 0915 x 4500	SHEET G304 2B LPE ASTM A240/A480	39.53
SSS120G3042BP+12192438	G304	2B LPE	1.20mm x 1219 x 2438	SHEET G304 2B LPE ASTM A240/A480	28.53
SSS120G3042BP+12193048	G304	2B LPE	1.20mm x 1219 x 3048	SHEET G304 2B LPE ASTM A240/A480	35.67
SSS120G3042BP+12194500	G304	2B LPE	1.20mm x 1219 x 4500	SHEET G304 2B LPE ASTM A240/A480	52.66
SSS120G3042BP+15242438	G304	2B LPE	1.20mm x 1524 x 2438	SHEET G304 2B LPE ASTM A240/A480	35.67
SSS120G3042BP+15243048N	G304	2B LPE	1.20mm x 1524 x 3048	SHEET G304 2B LPE ASTM A240/A480	44.59
SSS150G3042BP+09152438	G304	2B LPE	1.50mm x 0915 x 2438	SHEET G304 2B LPE ASTM A240/A480	26.77
SSS150G3042BP+09153048	G304	2B LPE	1.50mm x 0915 x 3048	SHEET G304 2B LPE ASTM A240/A480	33.47
SSS150G3042BP+09153658	G304	2B LPE	1.50mm x 0915 x 3658	SHEET G304 2B LPE ASTM A240/A480	40.16
SSS150G3042BP+12192438	G304	2B LPE	1.50mm x 1219 x 2438	SHEET G304 2B LPE ASTM A240/A480	35.66
SSS150G3042BP+12193048	G304	2B LPE	1.50mm x 1219 x 3048	SHEET G304 2B LPE ASTM A240/A480	44.59
SSS150G3042BP+15243048N	G304	2B LPE	1.50mm x 1524 x 3048	SHEET G304 2B LPE ASTM A240/A480	55.74
SSS200G3042BP+12192438	G304L	2B LPE	2.00mm x 1219 x 2438	SHEET G304L 2B LPE ASTM A240/A480	47.55
SSS200G3042BP+15243048N	G304L	2B LPE	2.00mm x 1524 x 3048	SHEET G304L 2B LPE ASTM A240/A480	74.32
SSS200G3042BP+15244000N	G304L	2B LPE	2.00mm x 1524 x 4000	SHEET G304L 2B LPE ASTM A240/A480	96.00
SSS200G3042BP+20004000	G304L	2B LPE	2.00mm x 2000 x 4000	SHEET G304L 2B LPE ASTM A240/A480	128.00
SSS250G3042BP+12192438	G304L	2B LPE	2.50mm x 1219 x 2438	SHEET G304L 2B LPE ASTM A240/A480	59.44
SSS250G3042BP+15243048	G304L	2B LPE	2.50mm x 1524 x 3048	SHEET G304L 2B LPE ASTM A240/A480	92.90
SSS250G3042BP+15244000	G304L	2B LPE	2.50mm x 1524 x 4000	SHEET G304L 2B LPE ASTM A240/A480	121.92
SSS250G3042BP+20004000	G304L	2B LPE	2.50mm x 2000 x 4000	SHEET G304L 2B LPE ASTM A240/A480	160.00
SSS300G3042BP+12192438	G304L	2B LPE	3.00mm x 1219 x 2438	SHEET G304L 2B LPE ASTM A240/A480	71.33
SSS300G3042BP+15243048N	G304L	2B LPE	3.00mm x 1524 x 3048	SHEET G304L 2B LPE ASTM A240/A480	111.48
SSS300G3042BP+15244000N	G304L	2B LPE	3.00mm x 1524 x 4000	SHEET G304L 2B LPE ASTM A240/A480	144.00
SSS300G3042BP+20004000	G304L	2B LPE	3.00mm x 2000 x 4000	SHEET G304L 2B LPE ASTM A240/A480	192.00

G316L – 2B

SSS060G316L2B+12192438	G316L	2B	0.60mm x 1219 x 2438	SHEET G316L 2B ASTM A240/A480	14.27
SSS070G316L2BP+12192438	G316L	2B LPE	0.70mm x 1219 x 2438	SHEET G316L 2B LPE ASTM A240/A480	16.64
SSS090G316L2BP+12192438	G316L	2B LPE	0.90mm x 1219 x 2438	SHEET G316L 2B LPE ASTM A240/A480	21.40
SSS120G316L2BP+12192438	G316L	2B LPE	1.20mm x 1219 x 2438	SHEET G316L 2B LPE ASTM A240/A480	28.53
SSS120G316L2BP+15243048	G316L	2B LPE	1.20mm x 1524 x 3048	SHEET G316L 2B LPE ASTM A240/A480	44.59
SSS150G316L2BP+12192438	G316L	2B LPE	1.50mm x 1219 x 2438	SHEET G316L 2B LPE ASTM A240/A480	35.66


Standard Sheet

Grades: 304, 304L, 316L, 430, 2205, 253MA

Finishes: 2B, BA, No. 4, 2E, Pattern

Unit of Supply: Each

Certification: Acc. to ASTM A240/A480



SSS

Product Code	Grade	Finish	Product Size (mm)	Description	Weight Ea (kg)
SSS150G316L2BP+15243048	G316L	2B LPE	1.50mm x 1524 x 3048	SHEET G316L 2B LPE ASTM A240/A480	55.74
SSS200G316L2BP+12192438	G316L	2B LPE	2.00mm x 1219 x 2438	SHEET G316L 2B LPE ASTM A240/A480	47.55
SSS200G316L2BP+15243048N	G316L	2B LPE	2.00mm x 1524 x 3048	SHEET G316L 2B LPE ASTM A240/A480	74.32
SSS200G316L2BP+15244000	G316L	2B LPE	2.00mm x 1524 x 4000	SHEET G316L 2B LPE ASTM A240/A480	97.54
SSS200G316L2BP+20004000	G316L	2B LPE	2.00mm x 2000 x 4000	SHEET G316L 2B LPE ASTM A240/A480	128.00
SSS250G316L2BP+12192438	G316L	2B LPE	2.50mm x 1219 x 2438	SHEET G316L 2B LPE ASTM A240/A480	59.44
SSS250G316L2BP+15243048N	G316L	2B LPE	2.50mm x 1524 x 3048	SHEET G316L 2B LPE ASTM A240/A480	92.90
SSS250G316L2BP+20004000	G316L	2B LPE	2.50mm x 2000 x 4000	SHEET G316L 2B LPE ASTM A240/A480	160.00
SSS300G316L2BP+12192438	G316L	2B LPE	3.00mm x 1219 x 2438	SHEET G316L 2B LPE ASTM A240/A480	71.24
SSS300G316L2BP+15243048	G316L	2B LPE	3.00mm x 1524 x 3048	SHEET G316L 2B LPE ASTM A240/A480	111.48
SSS300G316L2BP+15244000	G316L	2B LPE	3.00mm x 1524 x 4000	SHEET G316L 2B LPE ASTM A240/A480	146.30
SSS300G316L2BP+20004000	G316L	2B LPE	3.00mm x 2000 x 4000	SHEET G316L 2B LPE ASTM A240/A480	192.00

G304 – BA

SSS055G304BA+12192438	G304	BA LPE	0.55mm x 1219 x 2438	SHEET G304 BA LPE ASTM A240/A480	13.08
SSS070G304BA+12192438	G304	BA LPE	0.70mm x 1219 x 2438	SHEET G304 BA LPE ASTM A240/A480	16.64
SSS090G304BA+12192438	G304	BA LPE	0.90mm x 1219 x 2438	SHEET G304 BA LPE ASTM A240/A480	21.40
SSS120G304BA+09152438	G304	BA LPE	1.20mm x 0915 x 2438	SHEET G304 BA LPE ASTM A240/A480	21.42
SSS120G304BA+09153048	G304	BA LPE	1.20mm x 0915 x 3048	SHEET G304 BA LPE ASTM A240/A480	26.77
SSS120G304BA+09153658	G304	BA LPE	1.20mm x 0915 x 3658	SHEET G304 BA LPE ASTM A240/A480	32.13
SSS120G304BA+09154500	G304	BA LPE	1.20mm x 0915 x 4500	SHEET G304 BA LPE ASTM A240/A480	39.53
SSS120G304BA+12192438	G304	BA LPE	1.20mm x 1219 x 2438	SHEET G304 BA LPE ASTM A240/A480	28.53
SSS120G304BA+12193048	G304	BA LPE	1.20mm x 1219 x 3048	SHEET G304 BA LPE ASTM A240/A480	35.67
SSS120G304BA+12193658	G304	BA LPE	1.20mm x 1219 x 3658	SHEET G304 BA LPE ASTM A240/A480	42.81
SSS120G304BA+12194000	G304	BA LPE	1.20mm x 1219 x 4000	SHEET G304 BA LPE ASTM A240/A480	46.81
SSS120G304BA+12194500	G304	BA LPE	1.20mm x 1219 x 4500	SHEET G304 BA LPE ASTM A240/A480	52.66
SSS150G304BA+12192438	G304	BA LPE	1.50mm x 1219 x 2438	SHEET G304 BA LPE ASTM A240/A480	35.66
SSS150G304BA+12193048	G304	BA LPE	1.50mm x 1219 x 3048	SHEET G304 BA LPE ASTM A240/A480	44.00
SSS150G304BA+12193658	G304	BA LPE	1.50mm x 1219 x 3658	SHEET G304 BA LPE ASTM A240/A480	53.51
SSS200G304BA+12192438	G304	BA LPE	2.00mm x 1219 x 2438	SHEET G304 BA LPE ASTM A240/A480	47.55

G304 – No. 4

SSS055G304NO4+12192438	G304	NO4 LPE	0.55mm x 1219 x 2438	SHEET G304 NO4 LPE ASTM A240/A480	13.08
SSS070G304NO4+12192438	G304	NO4 LPE	0.70mm x 1219 x 2438	SHEET G304 NO4 LPE ASTM A240/A480	16.64
SSS090G304NO4+12192438	G304	NO4 LPE	0.90mm x 1219 x 2438	SHEET G304 NO4 LPE ASTM A240/A480	21.40
SSS090G304NO4+12193048	G304	NO4 LPE	0.90mm x 1219 x 3048	SHEET G304 NO4 LPE ASTM A240/A480	26.75
SSS090G304NO4+15243048	G304	NO4 LPE	0.90mm x 1524 x 3048	SHEET G304 NO4 LPE ASTM A240/A480	33.44
SSS120G304NO4+09152438	G304	NO4 LPE	1.20mm x 0915 x 2438	SHEET G304 NO4 LPE ASTM A240/A480	21.42
SSS120G304NO4+09153048	G304	NO4 LPE	1.20mm x 0915 x 3048	SHEET G304 NO4 LPE ASTM A240/A480	26.77
SSS120G304NO4+09153658	G304	NO4 LPE	1.20mm x 0915 x 3658	SHEET G304 NO4 LPE ASTM A240/A480	32.13
SSS120G304NO4+12192438	G304	NO4 LPE	1.20mm x 1219 x 2438	SHEET G304 NO4 LPE ASTM A240/A480	28.53
SSS120G304NO4+12193048	G304	NO4 LPE	1.20mm x 1219 x 3048	SHEET G304 NO4 LPE ASTM A240/A480	35.67
SSS120G304NO4+12193658	G304	NO4 LPE	1.20mm x 1219 x 3658	SHEET G304 NO4 LPE ASTM A240/A480	42.81
SSS120G304NO4+12194000	G304	NO4 LPE	1.20mm x 1219 x 4000	SHEET G304 NO4 LPE ASTM A240/A480	46.82
SSS120G304NO4+15242438	G304	NO4 LPE	1.20mm x 1524 x 2438	SHEET G304 NO4 LPE ASTM A240/A480	35.67
SSS120G304NO4+15243048	G304	NO4 LPE	1.20mm x 1524 x 3048	SHEET G304 NO4 LPE ASTM A240/A480	43.20
SSS150G304NO4+09152438	G304	NO4 LPE	1.50mm x 0915 x 2438	SHEET G304 NO4 LPE ASTM A240/A480	26.77
SSS150G304NO4+09153048	G304	NO4 LPE	1.50mm x 0915 x 3048	SHEET G304 NO4 LPE ASTM A240/A480	33.47
SSS150G304NO4+09153658	G304	NO4 LPE	1.50mm x 0915 x 3658	SHEET G304 NO4 LPE ASTM A240/A480	40.16
SSS150G304NO4+12192438	G304	NO4 LPE	1.50mm x 1219 x 2438	SHEET G304 NO4 LPE ASTM A240/A480	35.66

Other grades available on request ex.mill stock or production.


Standard Sheet

Grades: 304, 304L, 316L, 430, 2205, 253MA

Finishes: 2B, BA, No. 4, 2E, Pattern

Unit of Supply: Each

Certification: Acc. to ASTM A240/A480



SSS

Product Code	Grade	Finish	Product Size (mm)	Description	Weight Ea (kg)
SSS150G304NO4+12193048	G304	NO4 LPE	1.50mm x 1219 x 3048	SHEET G304 NO4 LPE ASTM A240/A480	44.59
SSS150G304NO4+12193658	G304	NO4 LPE	1.50mm x 1219 x 3658	SHEET G304 NO4 LPE ASTM A240/A480	53.51
SSS150G304NO4+15243048	G304	NO4 LPE	1.50mm x 1524 x 3048	SHEET G304 NO4 LPE ASTM A240/A480	55.74
SSS200G304NO4+12192438	G304	NO4 LPE	2.00mm x 1219 x 2438	SHEET G304 NO4 LPE ASTM A240/A480	47.55
SSS200G304NO4+15243048	G304	NO4 LPE	2.00mm x 1524 x 3048	SHEET G304 NO4 LPE ASTM A240/A480	72.00
SSS250G304NO4+12192438	G304	NO4 LPE	2.50mm x 1219 x 2438	SHEET G304 NO4 LPE ASTM A240/A480	59.50
SSS250G304NO4+15243048	G304	NO4 LPE	2.50mm x 1524 x 3048	SHEET G304 NO4 LPE ASTM A240/A480	92.90
SSS300G304NO4+12192438	G304	NO4 LPE	3.00mm x 1219 x 2438	SHEET G304 NO4 LPE ASTM A240/A480	71.33
SSS300G304NO4+15243048	G304	NO4 LPE	3.00mm x 1524 x 3048	SHEET G304 NO4 LPE ASTM A240/A480	111.48

G316L – No. 4

SSS090G316LNO4+12192438	G316L	NO4 LPE	0.90mm x 1219 x 2438	SHEET G316L NO4 LPE ASTM A240/A480	21.39
SSS120G316LNO4+12192438	G316L	NO4 LPE	1.20mm x 1219 x 2438	SHEET G316L NO4 LPE ASTM A240/A480	28.53
SSS150G316LNO4+12192438	G316L	NO4 LPE	1.50mm x 1219 x 2438	SHEET G316L NO4 LPE ASTM A240/A480	35.66
SSS200G316LNO4+12192438	G316L	NO4 LPE	2.00mm x 1219 x 2438	SHEET G316L NO4 LPE ASTM A240/A480	47.55
SSS250G316LNO4+12192435	G316L	NO4 LPE	2.50mm x 1219 x 2438	SHEET G316L NO4 LPE ASTM A240/A480	59.41
SSS300G316LNO4+12192438	G316L	NO4 LPE	3.00mm x 1219 x 2438	SHEET G316L NO4 LPE ASTM A240/A480	71.33

G430 – No. 4

SSS070G430NO4+12192438	G430	NO4 LPE	0.70mm x 1219 x 2438	SHEET G430 NO4 LPE ASTM A240/A480	16.64
SSS090G430NO4+12192438	G430	NO4 LPE	0.90mm x 1219 x 2438	SHEET G430 NO4 LPE ASTM A240/A480	21.40
SSS120G430NO4+12192438	G430	NO4 LPE	1.20mm x 1219 x 2438	SHEET G430 NO4 LPE ASTM A240/A480	28.53
SSS150G430NO4+12192438	G430	NO4 LPE	1.50mm x 1219 x 2438	SHEET G430 NO4 LPE ASTM A240/A480	35.66

G2205

SSS150G22052E+15003000	G2205	2E	1.50mm x 1500 x 3000	SHEET G2205 2E ASTM A240/A480	54.19
SSS200G22052E+15003000	G2205	2E	2.00mm x 1500 x 3000	SHEET G2205 2E ASTM A240/A480	72.00
SSS200G22052E+20004000	G2205	2E	2.00mm x 2000 x 4000	SHEET G2205 NYBY PRO 2E ASTM A240/ A480	128.00
SSS300G22052E+15003000	G2205	2E	3.00mm x 1500 x 3000	SHEET G2205 2E ASTM A240/A480	108.00
SSS300G22052E+20004000	G2205	2E	3.00mm x 2000 x 4000	SHEET G2205 NYBY PRO 2E ASTM A240/A480	192.00

G253 MA


SSS200G253MA2E+20004000	G253MA	2E	2.00mm x 2000 x 4000	SHEET G253MA 2E ASTM A240/A480	128.00
SSS300G253MA2E+20004000	G253MA	2E	3.00mm x 2000 x 4000	SHEET G253MA 2E ASTM A240/A480	192.00

Architectural Finishes

SSS125G304LINBA+12502438	G304 LINEN	BA LPE	1.25mm x 1250 x 2438	SHEET LINEN PATTERN G304 BA LPE	30.47
SSS125G304LINBA+12503048	G304 LINEN	BA LPE	1.25mm x 1250 x 3048	SHEET LINEN PATTERN G304 BA LPE	38.10
SSS125G304LINBA+12503658	G304 LINEN	BA LPE	1.25mm x 1250 x 3658	SHEET LINEN PATTERN G304 BA LPE	45.72
SSS125G304LINBA+12505000	G304 LINEN	BA LPE	1.25mm x 1250 x 5000	SHEET LINEN PATTERN G304 BA LPE	62.50
SSS120G304SQBA+12502438	G304 SQUARES	LPE	1.20mm x 1250 x 2438	SHEET SQUARES PATTERN G304 LPE	29.26
SSS120G304SQBA+12503048	G304 SQUARES	LPE	1.20mm x 1250 x 3048	SHEET SQUARES PATTERN G304 LPE	36.58
SSS120G304SQBA+12503658	G304 SQUARES	LPE	1.20mm x 1250 x 3658	SHEET SQUARES PATTERN G304 LPE	43.90



Linen Pattern Sheet



Squares Pattern Sheet

Coloured Sheet

Sheet sizes:
1250 x

2250, 2500, 3000,
4000mm

Thicknesses:
0.6 to 3.0 mm

Coloured
sheets have a
20 mm margin
alongside their
width and length
that cannot be
used if it remains
in sight.

Colours are
indicative only.

For repeat
orders, we
require a sample
as reference.

AISI 304 - 316
stainless steel



1 - polished blue



2 - polished black



3 - satin blue



4 - satin black



5 - polished champagne



6 - polished violet




7 - satin champagne



8 - satin grey



9 - polished gold




10 - polished red




11 - satin gold



12 - satin red




13 - polished bronze



14 - polished green



15 - satin bronze



16 - satin green



17 - blue SB



18 - blue satin inc.




19 - shot blasted red



20 - shot blasted blue



21 - champagne SB



22 - satin green inc.



23 - shot blasted green




24 - shot blasted champagne



25 - gold SB



26 - red SB



27 - satin gold inc.



28 - shot blasted gold



29 - bronze SB



30 - green SB



31 - satin bronze inc.



32 - shot blasted bronze

Supply on indent
basis ex. Australia
or Italian mill
production.

Patterned Sheet

Sheet sizes:

1250 mm

x

2250, 2500,
3000, 4000 mm

Thicknesses:

0.6 to 3.0 mm

Patterned sheets have a 20 mm margin alongside their width and length that cannot be used if it remains in sight.

2WL, 6WL, squares, linen, skin, dots, stripes style can be supplied in brushed or SB (Scotch Brite).


5WL polished can be supplied brushed on top.

Colours are indicative only.


Pattern depth may vary depending on sheet thickness.

For repeat orders, we require a sample as reference.


AISI 304 - 316 stainless steel




33 - dots gold



34 - drops blue




35 - linen gold



36 - skin bronze



37 - linen red




38 - weave gold




39 - stripes bronze




40 - drops red




41 - dune black




42 - mesh blue




43 - squares gold




44 - dots bronze




45 - dune blue



46 - rain bronze



47 - stripes blue



48 - skin green



49 - 5WL SB




50 - stripes polished




51 - polished skin




52 - shot blasted



53 - polished 5WL



54 - 6WL SB




55 - chequered




56 - mirror finish



57 - 2WL SB




58 - polished 6WL



59 - squares polished




60 - polished 7



61 - polished 2WL



62 - satin 5WL



63 - linen polished



64 - dots polished

Supply on indent basis ex. Australia or Italian mill production.

Special Finishes Sheet

Sheet sizes:
1250 x 2500 mm

Pattern size:
1220 x 2470 mm

Thicknesses:
0.7 to 2.0 mm


Colours are
indicative only.

The brightness of
the product may
vary depending
on the raw
material used.

For repeat
orders, we
require a sample
as reference.

AISI 304 - 316
stainless steel

Supply on
indent basis
ex. Australia
or Italian mill
production.



65 - SC 604



66 - SC 704 blue



67 - SC 804 bronze




68 - SC 135



69 - SC 113



70 - SC 213 gold



71 - SC 313 red



72 - SC 143



73 - SC 111



74 - SC 211 green



75 - SC 311 gold



76 - SC 147




77 - SC 101



78 - SC 201 red




79 - SC 301 blue




80 - SC 107 D

Woven Wire Mesh

Examples (Pictures shown are as close as possible to scale)

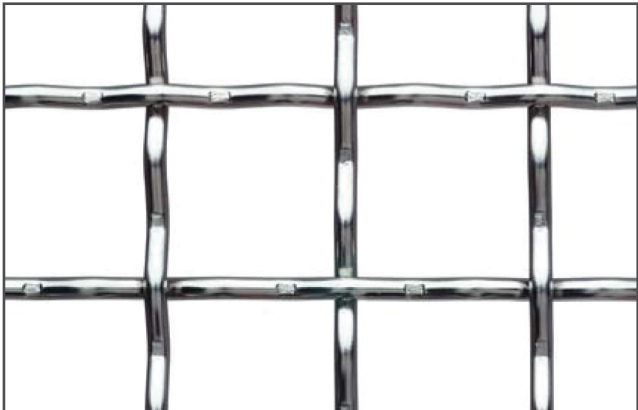


22.4mm Aperture x 3.15mm Wire Dia. / Intercrimped

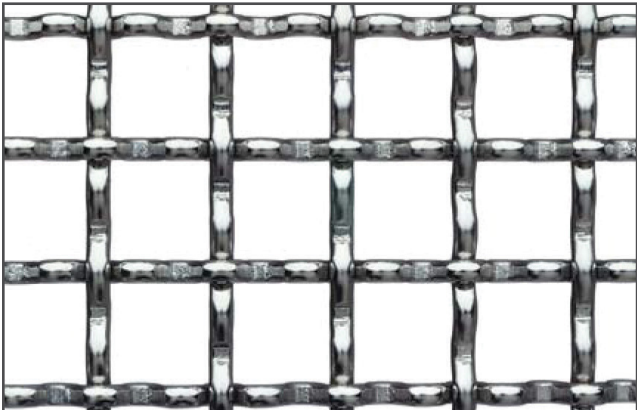


12.7mm Aperture x 3.0mm Wire Dia. / Intercrimped




6.8mm Aperture x 1.6mm Wire Dia.

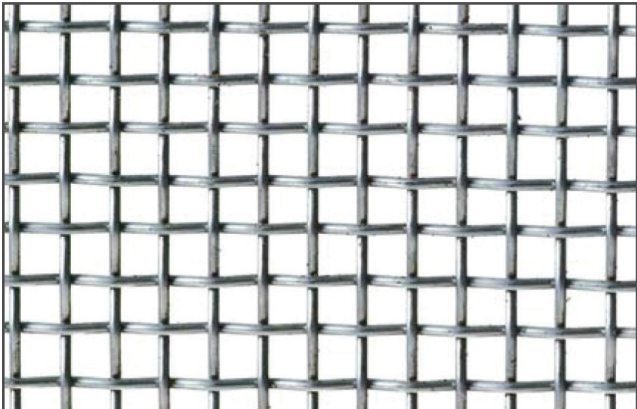


4.75mm Aperture x 1.6mm Wire Dia.

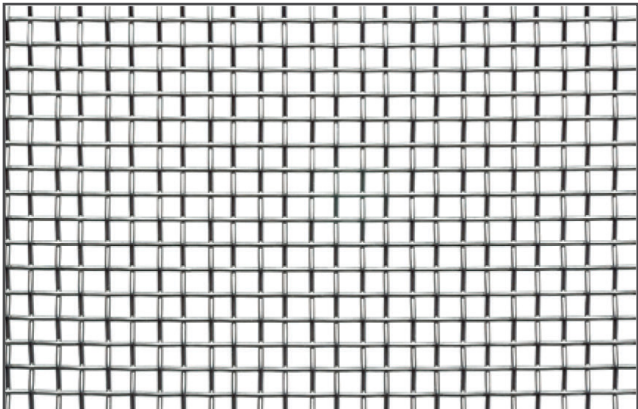


2.5mm Aperture x 0.75mm Wire Dia.

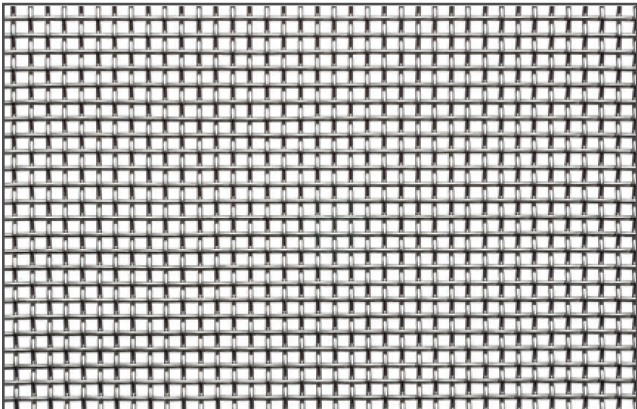

1.4mm Aperture x 0.71mm Wire Dia.

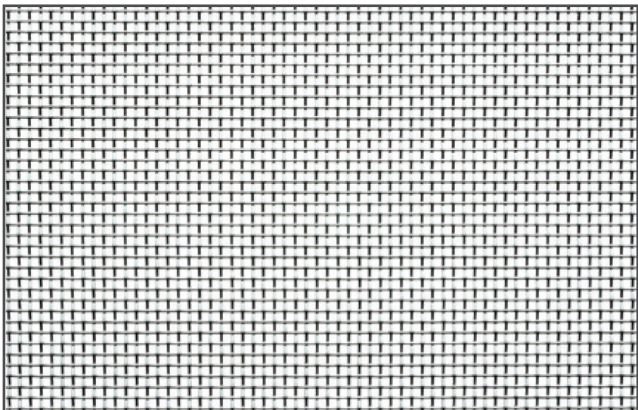


0.9mm Aperture x 0.375mm Wire Dia.

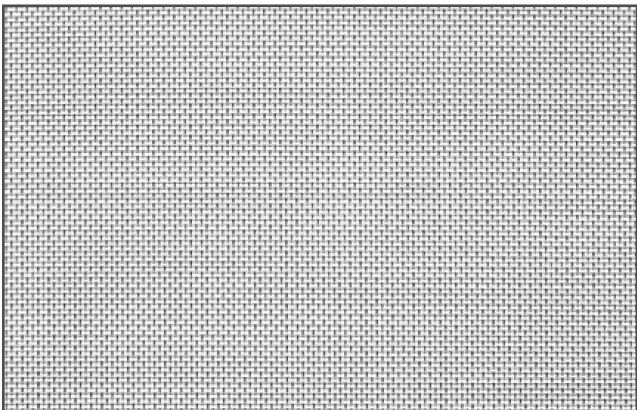

0.415mm Aperture x 0.22mm Wire Dia.

Woven Wire Mesh

- Rolls up to 30 m in length and 1,550 mm in width are available in stainless steel grade 304 and 316
- Mesh can be cut to specific length

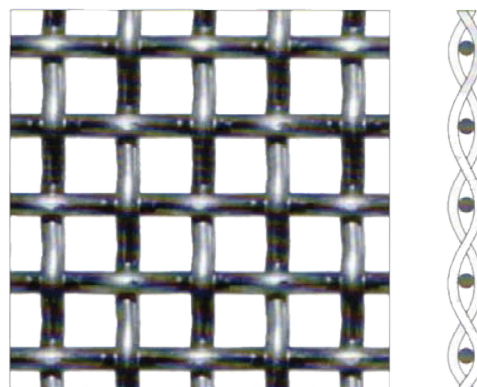

Part-Number	Material Grade	Aperture mm	Wire Dia. mm	Mesh Imp	SWG	Open Area %	Roll width mm	Weight kg per m
W00.6-8-122-6	316	35	4			77	2440x1220 Sheet	22.00
W001-10-127	304	22.4	3.15	1	10	77	1270	9.16
W001-10-124-6	316	22.4	3.15	1	10	77	1245	8.80
W001-10-155-6	316	22.4	3.15	1	10	77	1550	11.00
W0.75-12-127	304	16	2.5	0.75	12	75	1270	5.76
W0.75-12-124-6	316	16	2.5	0.75	12	75	1245	5.76
W001.6-10-127	304	12.7	3	1.6	10	65	1270	9.33
W001.6-10-124-6	316	12.7	3	1.6	10	65	1245	9.33
W002-16-124-I/C	304	11.2	1.6	2	16	77	1245	3.48
W002-16-124-6	316	11.2	1.6	2	16	77	1245	3.41
W002-14-127	304	10.6	2	2	14	70	1270	6.82
W002-14-124-6	316	10.6	2	2	14	70	1245	6.82
W002-12-127	304	10	2.5	2	12	63	1270	8.53
W002-12-124-6	316	10	2.5	2	12	63	1245	8.53
W002-12-155-6	316	10	2.5	2	12	63	1550	10.70
W003-16-124	304	6.8	1.6	3	16	67	1245	3.94
W003-16-124-6	316	6.8	1.6	3	16	67	1245	3.94
W003-14-124	304	6.3	2	3	14	57	1245	6.20
W004-19-124	304	5.3	1	4	19	71	1245	2.79
W004-19-124-I/C	304	5.3	1	4	19	71	1245	2.79
W004-18-124	304	5.1	1.2	4	18	65	1245	3.35
W004-18-155	304	5.1	1.2	4	18	65	1550	4.20
W004-16-124	304	4.75	1.6	4	16	55	1245	6.60
W004-16-124-6	316	4.75	1.6	4	16	55	1245	6.60
W005-18-124	304	3.9	1.2	5	18	58	1245	5.00
W005-16-124	304	3.5	1.6	5	16	46	1245	7.70
W005-16-155	304	3.5	1.6	5	16	46	1550	9.65
W006-20-124	304	3.3	0.91	6	20	61	1245	3.27
W006-20-124-6	316	3.3	0.91	6	20	61	1245	3.27
W006-20-155	304	3.3	0.91	6	20	61	1550	4.10
W006-18-124	304	3	1.2	6	18	51	1245	6.05
W006-18-124-6	316	3	1.2	6	18	51	1245	6.05
W006-16-124	304	2.7	1.6	6	16	38	1245	9.60
W008-22-124-6	316	2.5	0.7	8	22	60	1245	2.68
W008-22-155	304	2.5	0.7	8	22	60	1550	3.37
W008-20-124	304	2.3	0.91	8	20	51	1245	4.40
W008-20-155	304	2.3	0.91	8	20	51	1550	5.52
W010-26-105	304	2.1	0.45	10	26	67	1050	1.45
W010-26-124	304	2.1	0.45	10	26	67	1245	1.68
W010-26-155	304	2.1	0.45	10	26	67	1550	2.10
W008-18-124	304	2	1.2	8	18	38	1245	5.81
W008-18-155-6	316	2	1.2	8	18	38	1550	7.27
W010-24-124-6	316	2	0.56	10	24	61	1245	2.40
W009-20-155	304	1.9	0.91	9	20	46	1550	5.70
W010-23-124	304	1.9	0.61	10	23	58	1245	2.58
W010-21-124	304	1.74	0.8	10	21	46	1245	6.00
W010-20-124	304	1.6	0.91	10	20	41	1245	6.55


Woven Wire Mesh

Part-Number	Material Grade	Aperture mm	Wire Dia. mm	Mesh Imp	SWG	Open Area %	Roll width mm	Weight kg per m
W010-20-124-6	304	1.6	0.91	10	20	41	1245	6.55
W012-25-124	304	1.6	0.5	12	25	58	1245	2.02
W012-25-124-6	316	1.6	0.5	12	25	58	1245	2.02
W012-22-124	304	1.4	0.71	12	22	44	1245	4.07
W012-22-155	304	1.4	0.71	12	22	44	1550	5.10
W012-22-155-6	316	1.4	0.71	12	25	44	1550	5.10
W014-24-155	304	1.25	0.56	14	20	48	1550	3.00
W014-25-124	304	1.3	0.5	14	24	52	1245	2.35
W012-20-124	304	1.2	0.9	12	28	32	1245	5.39
W016-28-124	304	1.2	0.37	16	26	58	1245	1.40
W016-26-124	304	1.1	0.45	16	26	51	1245	2.20
W016-26-155	304	1.1	0.45	16	24	51	1550	2.76
W016-24-124	304	1	0.56	16	24	42	1245	3.42
W016-24-124-6	316	1	0.56	16	24	42	1245	3.42
W016-24-155	304	1	0.56	16	24	42	1550	4.35
W016-22-124	304	0.9	0.71	16	22	31	1245	4.32
W020-28-124	304	0.9	0.37	20	28	50	1245	1.75
W020-28-124-6	316	0.9	0.37	20	28	50	1245	1.75
W020-28-155	304	0.9	0.37	20	28	50	1550	2.20
W020-28-155-6	316	0.9	0.37	20	28	50	1550	2.20
W020-26-124	304	0.81	0.45	20	26	41	1245	3.30
W020-26-124-6	316	0.81	0.45	20	26	41	1245	3.30
W020-26-155	304	0.81	0.45	20	26	41	1550	4.20
W024-30-124	304	0.75	0.31	24	30	49	1245	0.84
W020-24-124	304	0.71	0.56	20	24	31	1245	3.71
W024-26-124	304	0.6	0.45	24	26	32	1245	2.52
W024-26-155	304	0.6	0.45	24	26	32	1550	3.20
W030-32-124	304	0.57	0.27	30	32	46	1245	1.60
W030-30-155	304	0.53	0.31	30	30	39	1550	1.53
W030-30-124-6	316	0.53	0.31	30	30	39	1245	1.22
W040-34-124-6	316	0.415	0.22	40	34	42	1245	1.34
W040-34-155-6	316	0.415	0.22	40	34	42	1550	1.68
W050-36-124-6	316	0.31	0.2	50	36	38	1245	1.34
W050-36-155-6	316	0.31	0.2	50	36	38	1550	1.68
W060-37-124-6	316	0.26	0.16	60	37	35	1245	1.06
W060-37-155-6	316	0.26	0.16	60	37	35	1550	1.33
W070-38-124-6	316	0.21	0.15	70	38	34	1245	0.96
W070-38-155-6	316	0.21	0.15	70	38	34	1550	1.20
W080-39-124-6	316	0.19	0.125	80	39	34	1245	0.88
W080-39-155-6	316	0.19	0.125	80	39	34	1550	1.10
W100-42-124-6	316	0.15	0.1	100	42	36	1245	0.68
W100-42-155-6	316	0.15	0.1	100	42	36	1550	0.86
W120-44-124-6	316	0.13	0.08	120	44	37	1245	0.60
W120-44-152-6	316	0.13	0.08	120	44	37	1520	0.76
W140-45-122	304	0.11	0.071	140	45	37	1220	0.47
W150-45-124-6	316	0.1	0.063	150	45	37	1245	0.43
W150-45-155-6	316	0.1	0.063	150	45	37	1550	0.54
W200-47-124-6	316	0.08	0.05	200	47	38	1245	0.35
W200-47-155-6	316	0.08	0.05	200	47	38	1550	0.44
W250-48-155-6P	316	0.063	0.04	250	48	38	2000	0.34
W250-48-200-6T	316	0.063	0.04	250	48	38	2000	0.45
W300-49-124-6P	316	0.055	0.03	300	49	32	1245	0.22
W300-48-124-6T	316	0.053	0.04	270	48	32	1245	0.26
W325-49-124-6P	316	0.045	0.032	325	49	34	1245	0.2
W350-50-124-6P	316	0.047	0.025	350	50	43	1245	0.16
W400-49-124-6T	316	0.034	0.03	400	49	27	1245	0.17
W400-49-200-6T	316	0.034	0.03	400	49	27	2000	0.23
W500-50-124-6T	316	0.025	0.025	500	50	25	1245	0.14

Welded Wire Mesh

Rolls


- Welded Wire Mesh is available in 304 and 316 grade stainless steel rolls
- Typically supplied in 30 m rolls, some sizes can be cut to specific length

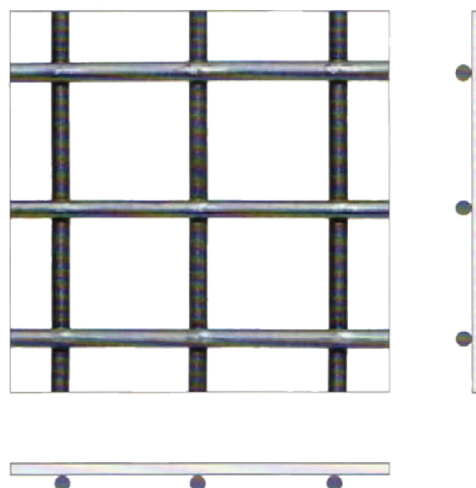

Part-Number	Material Grade	Aperture mm	Wire Dia. mm	Pitch mm	Roll width mm	Weight kg per m
WLD-6.35-0.8	304	5.55	0.8	6.35	1220	2.00
WLD-10-0.8	304	9.2	0.8	10	1220	2.40
WLD-12.7-1.2	304	11.5	1.2	12.7	1220	2.30
WLD-12.7-1.6	304	11.1	1.6	12.7	1220	3.10
WLD-12.7-1.6-6	316	11.1	1.6	12.7	1220	3.10
WLD-18-2	304	16	2	18	1220	3.75
WLD-25-1.2	304	24.2	1.2	25.4	1220	1.80
WLD-25-1.6	304	23.8	1.6	25.4	1220	2.40
WLD-25-1-6	316	24.4	1	25.4	1220	1.00
WLD-25-2	304	23.4	2	25.4	1220	3.00
WLD-25-2-6	316	23.4	2	25.4	1220	3.00
WLD-50-2-6	316	48	2	50	1220	1.00

Welded Wire Mesh Sheet


- Welded Wire Mesh is available in 304 and 316 grade stainless steel sheets as well as roll form

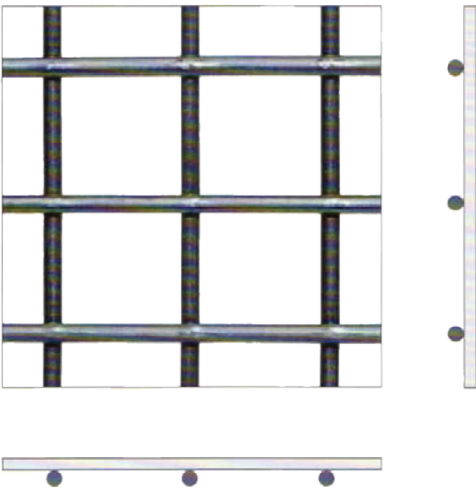


Part-Number	Material Grade	Aperture mm	Wire Dia. mm	Pitch mm	Roll width mm	Weight kg per m
WLD-25-3	304	21.85	3.15	25	2000x1000	12.00
WLD-25-3A	304	21.85	3.15	25	2400x1200	13.50
WLD-25-3-6	316	21.85	3.15	25	2500x1200	13.50
WLD-40-4	304	36	4	40	2400x1200	12.5
WLD-50-3	304	47	3	50	2500x1200	8.00
WLD-50-4	304	46	4	50	2000x1000	8.00
WLD-50-4A	304	46	4	50	2400x1200	12.00
WLD-50-4-6	316	46	4	50	2500x1200	12.00
WLD-100-3	304	96.85	3.15	100	2500x1200	4.00
WLD-100-6	304	94	6	100	2500x1200	14.00

Perforated Mesh


Round Holes

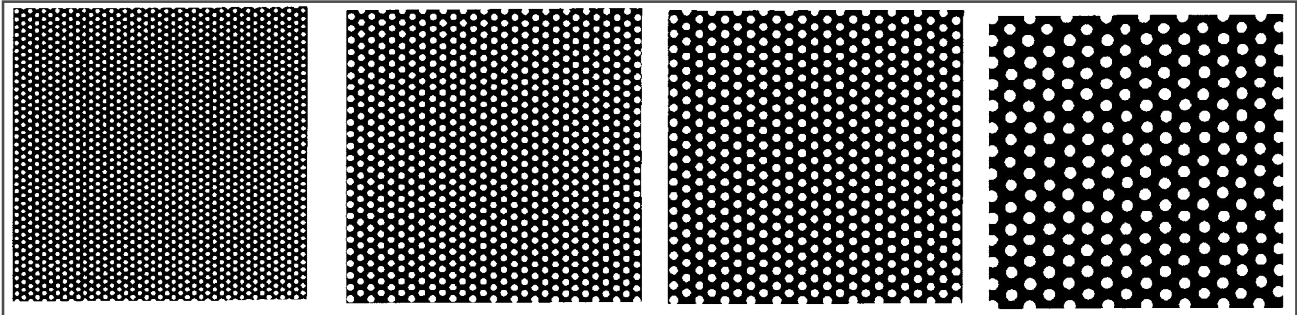


R0.5 T1 23% - 0.5mm hole R0.8 T1.5 25% - 0.8mm hole R1T2 23% - 1mm hole R1.5 T2.75 26% - 1.5mm hole

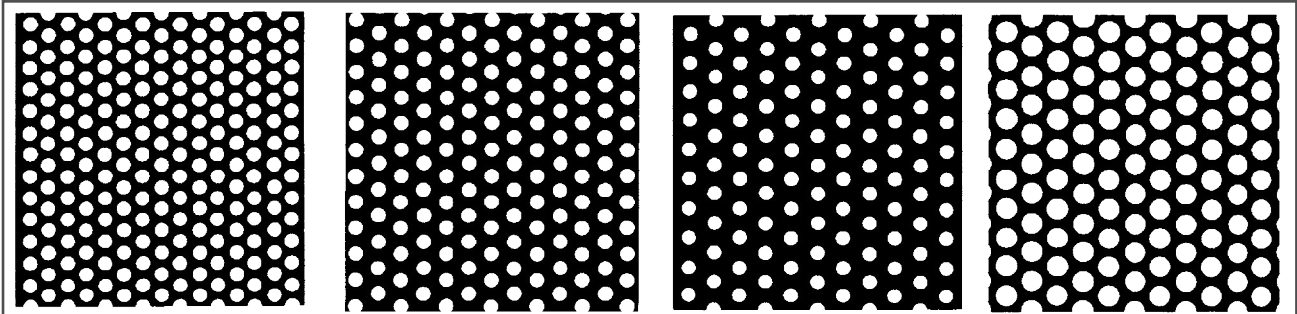

R2 T3 40% - 2mm hole R2 T3.5 30% - 2mm hole R2 T4 23% - 2mm hole R3 T4 50% - 3mm hole

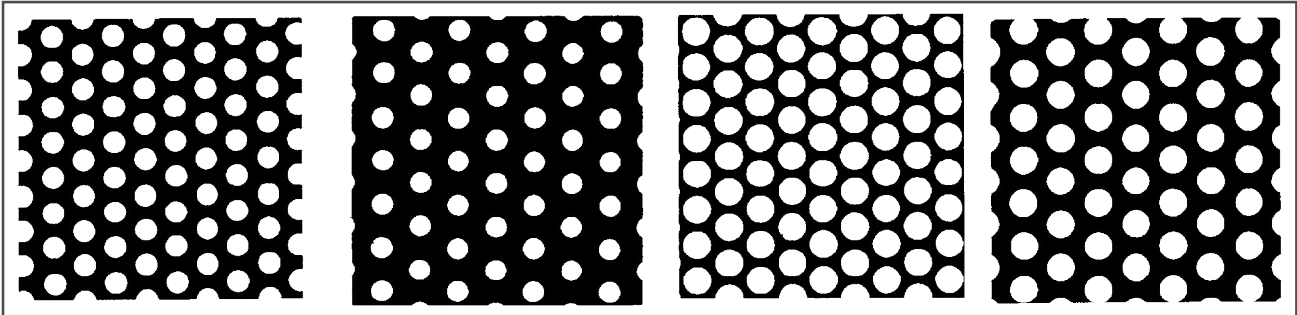


R3 T5 32% - 3mm hole R3 T6 23% - 3mm hole R4 T5 58% - 4mm hole R4 T6 40% - 4mm hole

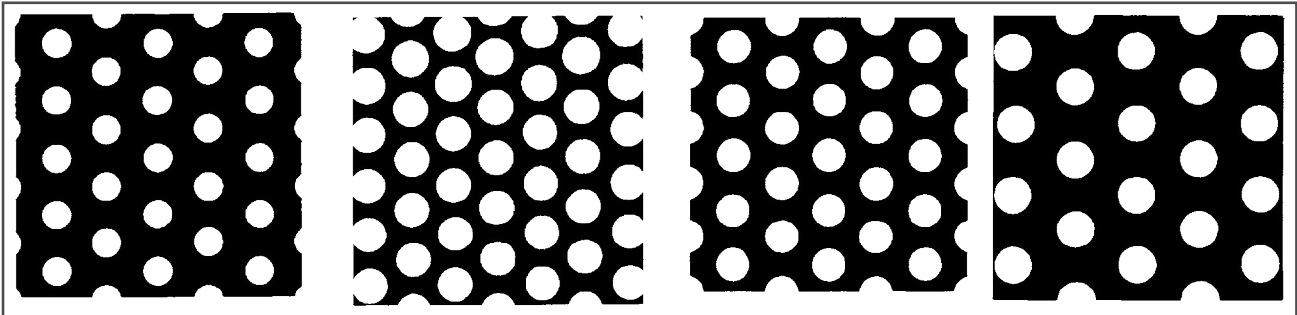

R4 T8 23% - 4mm hole R5 T7 45% - 5mm hole R5 T8 35% - 5mm hole R5 T10 23% - 5mm hole

Perforated Mesh

Round Holes

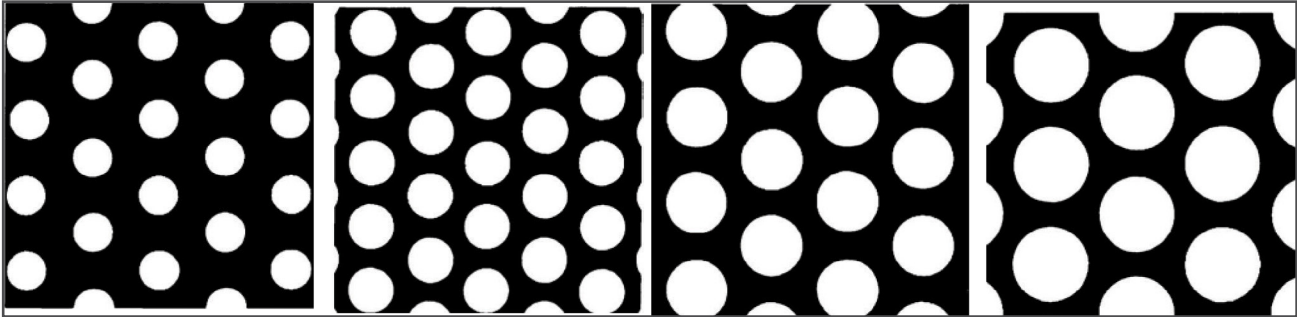


R5 T10 23% - 5mm hole

R6T8.5 45% - 6 mm hole

R8 T11 47% - 8mm hole

R10 T13 53% - 10mm hole

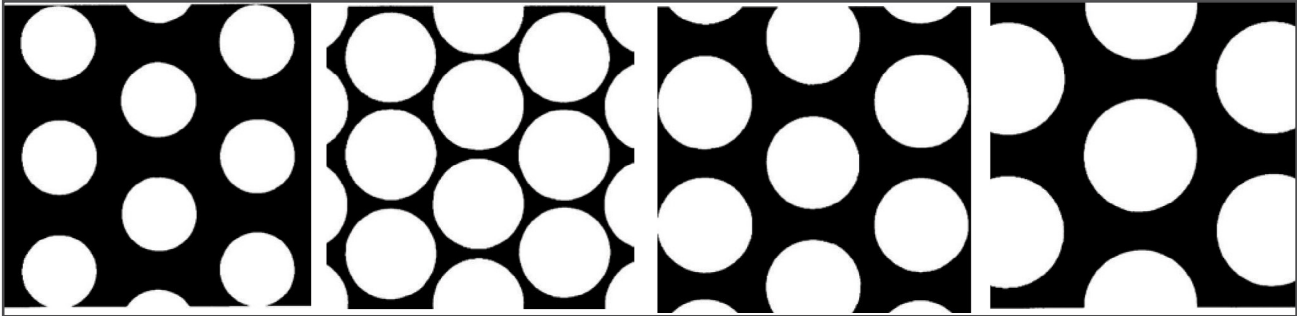


R10 T15 40% - 10mm hole

R12 T13 77% - 12mm hole

R12 T16 51% - 12mm hole

R15 T20 50% - 15mm hole



R20 T27 51% - 20mm hole

Perforated Mesh

Round Holes

- Stainless Steel grade 304 and 316L
- Sheet sizes 1000 x 2000 or 1250 x 2500 mm
- Burr free, flat sheets
- Custom made sheets are available on request



Part-Number	Material Grade	Hole size mm	Pitch mm	Open Area %	Thickness mm	Sheet Size mm	Weight kg per sheet
PR0.5T1A	304	0.5	1	23	0.4	2000x1000	5.00
PR0.8T1.5	304	0.8	1.5	25	0.5	2000x1000	6.00
PR0.8T1.5B	316	0.8	1.5	25	0.5	2000x1000	6.00
PR1T2A	304	1	2	23	0.5	2000x1000	6.00
PR1T2B	304	1	2	23	0.75	2000x1000	9.00
PR1T2C	304	1	2	23	1	2000x1000	12.00
PR1.1T2	316	1.1	2	23	0.75	2000x1000	9.00
PR1.5T2.75	304	1.5	2.75	26	1	2000x1000	12.00
PR1.5T2.75B	316	1.5	2.75	26	1	2000x1000	12.00
PR2T3A	304	2	3	40	1	2000x1000	10.00
PR2T3.5A	304	2	3.5	30	1	2000x1000	11.00
PR2T3.5B	304	2	3.5	30	1.5	2000x1000	17.00
PR2T3.5C	304	2	3.5	30	0.5	2000x1000	6.00
PR2T3.5D	316	2	3.5	30	1	2000x1000	11.00
PR3T4A	304	3	4	50	1	2000x1000	8.00
PR3T4B	316	3	4	50	1	2000x1000	8.00
PR3T5A	304	3	5	32	1	2000x1000	11.00
PR3T5B	304	3	5	32	1.5	2000x1000	16.00
PR3T5C	316	3	5	32	1	2000x1000	11.00
PR3T5D	304	3	5	32	2	2000x1000	22.00
PR3T5E	304	3	5	32	0.5	2000x1000	5.00
PR3T5F	316	3	5	32	1.5	2000x1000	16.00
PR3T5G	304	3	5	32	1	2500x1250	17.00
PR3T5H	304	3	5	32	1.5	2500x1250	25.00
PR3T5J	316	3	5	32	2	2000x1000	22.00
PR4T5A	304	4	5	58	1	2000x1000	7.00
PR4T6	304	4	6	40	1	2000x1000	10.00
PR4T7A	304	4	7	29	1.5	2000x1000	17.00
PR4T7C	316	4	7	29	1.5	2000x1000	17.00
PR4T7D	316	4	7	29	2	2000x1000	23.00
PR5T6A	304	5	6	63	1	2000x1000	6.00
PR5T6B	304	5	6	63	1.5	2000x1000	9.00
PR5T7A	304	5	7	45	0.5	2000x1000	5.00
PR5T7B	304	5	7	45	1	2000x1000	9.00
PR5T7C	316	5	7	45	1	2000x1000	9.00
PR5T8A	304	5	8	35	1.5	2000x1000	15.00
PR5T8B	304	5	8	35	2	2000x1000	21.00
PR5T8C	316	5	8	35	1.5	2000x1000	15.00
PR5T8D	304	5	8	35	1	2500x1250	16.00
PR5T8E	304	5	8	35	1.5	2500x1250	24.00
PR5T8F	316	5	8	35	1	2000x1000	10.00
PR5T10	304	5	10	23	3	2000x1000	37.00
PR6T8.5A	304	6	8.5	45	0.5	2000x1000	4.00

Perforated Mesh

Round Holes

Part-Number	Material Grade	Hole size mm	Pitch mm	Open Area %	Thickness mm	Sheet Size mm	Weight kg per sheet
PR6T8.5B	304	6	8.5	45	1	2000x1000	9.00
PR6T9A	304	6	9	40	1	2000x1000	10.00
PR6T9C	304	6	9	40	1.5	2000x1000	14.00
PR6T9B	304	6	9	40	2	2000x1000	19.00
PR6T12A	304	6	12	23	3	2000x1000	37.00
PR8T11A	304	8	11	47	1	2000x1000	8.00
PR8T11B	316	8	11	47	1	2000x1000	8.00
PR8T11C	316	8	11	47	1.5	2000x1000	13.00
PR8T12A	304	8	12	40	1.5	2000x1000	14.00
PR8T12B	304	8	12	40	2	2000x1000	19.00
PR8T12C	304	8	12	40	3	2000x1000	29.00
PR10T13	304	10	13	53	1	2000x1000	7.00
PR10T13B	304	10	13	53	1	2500x1250	12.00
PR10T15A	304	10	15	40	1.5	2000x1000	14.00
PR10T15B	304	10	15	40	2	2000x1000	19.00
PR10T15C	304	10	15	40	3	2000x1000	29.00
PR10T15D	316	10	15	40	1.5	2000x1000	14.00
PR10T15E	304	10	15	40	1.5	2500x1250	22.00
PR12T17A	304	12	17	45	1.5	2000x1000	13.00
PR15T20A	304	15	20	50	1	2000x1000	8.00
PR15T21A	304	15	21	46	1.5	2000x1000	13.00
PR15T21B	304	15	21	46	3	2000x1000	26.00


Plate

Grades: 304L, 316L, 2205, 3CR12, 253MA ASTM A240/A480

Finishes: 2B LPE, ID, No. 1, 2E

Unit of Supply: Each

Certification: Acc. to

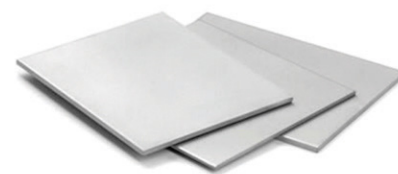

PSS

Product Code	Grade	Finish	Product Size (mm)	Description	Weight Ea (kg)
--------------	-------	--------	-------------------	-------------	----------------

G304L – 2B

PSS004G304L2BP+12192438	G304L	2B LPE	4mm x 1219 x 2438	PLATE G304L 2B LPE ASTM A240/A480	95.10
PSS004G304L2BP+15003000	G304L	2B LPE	4mm x 1500 x 3000	PLATE G304L 2B LPE ASTM A240/A480	144.00
PSS004G304L2BP+15004000	G304L	2B LPE	4mm x 1500 x 4000	PLATE G304L 2B LPE ASTM A240/A480	192.00
PSS004G304L2BP+15006000	G304L	2B LPE	4mm x 1500 x 6000	PLATE G304L 2B LPE ASTM A240/A480	288.00
PSS004G304L2BP+20004000	G304L	2B LPE	4mm x 2000 x 4000	PLATE G304L 2B LPE ASTM A240/A480	256.00
PSS004G304L2BP+20006000	G304L	2B LPE	4mm x 2000 x 6000	PLATE G304L 2B LPE ASTM A240/A480	384.00
PSS005G304L2BP+12192438	G304L	2B LPE	5mm x 1219 x 2438	PLATE G304L 2B LPE ASTM A240/A480	118.88
PSS005G304L2BP+15003000	G304L	2B LPE	5mm x 1500 x 3000	PLATE G304L 2B LPE ASTM A240/A480	180.00
PSS005G304L2BP+15004000	G304L	2B LPE	5mm x 1500 x 4000	PLATE G304L 2B LPE ASTM A240/A480	240.00
PSS005G304L2BP+15006000	G304L	2B LPE	5mm x 1500 x 6000	PLATE G304L 2B LPE ASTM A240/A480	360.00
PSS005G304L2BP+20004000	G304L	2B LPE	5mm x 2000 x 4000	PLATE G304L 2B LPE ASTM A240/A480	320.00
PSS005G304L2BP+20006000	G304L	2B LPE	5mm x 2000 x 6000	PLATE G304L 2B LPE ASTM A240/A480	480.00
PSS006G304L2BP+12192438	G304L	2B LPE	6mm x 1219 x 2438	PLATE G304L 2B LPE ASTM A240/A480	142.65
PSS006G304L2BP+15003000	G304L	2B LPE	6mm x 1500 x 3000	PLATE G304L 2B LPE ASTM A240/A480	216.03
PSS006G304L2BP+15004000	G304L	2B LPE	6mm x 1500 x 4000	PLATE G304L 2B LPE ASTM A240/A480	288.00
PSS006G304L2BP+15006000	G304L	2B LPE	6mm x 1500 x 6000	PLATE G304L 2B LPE ASTM A240/A480	432.00
PSS006G304L2BP+20004000	G304L	2B LPE	6mm x 2000 x 4000	PLATE G304L 2B LPE ASTM A240/A480	384.00
PSS006G304L2BP+20006000	G304L	2B LPE	6mm x 2000 x 6000	PLATE G304L 2B LPE ASTM A240/A480	576.00
PSS008G304L2BP+15003000	G304L	2B LPE	8mm x 1500 x 3000	PLATE G304L 2B LPE ASTM A240/A480	290.52
PSS008G304L2BP+15006000	G304L	2B LPE	8mm x 1500 x 6000	PLATE G304L 2B LPE ASTM A240/A480	576.00
PSS008G304L2BP+20004000	G304L	2B LPE	8mm x 2000 x 4000	PLATE G304L 2B LPE ASTM A240/A480	512.00
PSS008G304L2BP+20006000	G304L	2B LPE	8mm x 2000 x 6000	PLATE G304L 2B LPE ASTM A240/A480	768.00

G316L – 2B

PSS004G316L2BP+12192438	G316L	2B LPE	4mm x 1219 x 2438	PLATE G316L 2B LPE ASTM A240/A480	95.10
PSS004G316L2BP+15003000	G316L	2B LPE	4mm x 1500 x 3000	PLATE G316L 2B LPE ASTM A240/A480	144.00
PSS004G316L2BP+20004000	G316L	2B LPE	4mm x 2000 x 4000	PLATE G316L 2B LPE ASTM A240/A480	256.00
PSS004G316L2BP+20006000	G316L	2B LPE	4mm x 2000 x 6000	PLATE G316L 2B LPE ASTM A240/A480	384.00
PSS005G316L2BP+12192438	G316L	2B LPE	5mm x 1219 x 2438	PLATE G316L 2B LPE ASTM A240/A480	118.88
PSS005G316L2BP+15003000	G316L	2B LPE	5mm x 1500 x 3000	PLATE G316L 2B LPE ASTM A240/A480	180.00
PSS005G316L2BP+15006000	G316L	2B LPE	5mm x 1500 x 6000	PLATE G316L 2B LPE ASTM A240/A480	360.00
PSS005G316L2BP+20004000	G316L	2B LPE	5mm x 2000 x 4000	PLATE G316L 2B LPE ASTM A240/A480	320.00
PSS005G316L2BP+20006000	G316L	2B LPE	5mm x 2000 x 6000	PLATE G316L 2B LPE ASTM A240/A480	480.00
PSS006G316L2BP+12192438	G316L	2B LPE	6mm x 1219 x 2438	PLATE G316L 2B LPE ASTM A240/A480	142.65
PSS006G316L2BP+15003000	G316L	2B LPE	6mm x 1500 x 3000	PLATE G316L 2B LPE ASTM A240/A480	216.03
PSS006G316L2BP+15004000	G316L	2B LPE	6mm x 1500 x 4000	PLATE G316L 2B LPE ASTM A240/A480	288.00
PSS006G316L2BP+15006000	G316L	2B LPE	6mm x 1500 x 6000	PLATE G316L 2B LPE ASTM A240/A480	432.00
PSS006G316L2BP+20004000	G316L	2B LPE	6mm x 2000 x 4000	PLATE G316L 2B LPE ASTM A240/A480	384.00
PSS006G316L2BP+20006000	G316L	2B LPE	6mm x 2000 x 6000	PLATE G316L 2B LPE ASTM A240/A480	576.00
PSS008G316L2BP+15003000	G316L	2B LPE	8mm x 1500 x 3000	PLATE G316L 2B LPE ASTM A240/A480	288.00
PSS008G316L2BP+15006000	G316L	2B LPE	8mm x 1500 x 6000	PLATE G316L 2B LPE ASTM A240/A480	576.00
PSS008G316L2BP+20004000	G316L	2B LPE	8mm x 2000 x 4000	PLATE G316L 2B LPE ASTM A240/A480	512.00


Plate

Grades: 304L, 316L, 2205, 3CR12, 253MA ASTM A240/A480

Finishes: 2B LPE, 1D, No. 1, 2E

Unit of Supply: Each

Certification: Acc. to

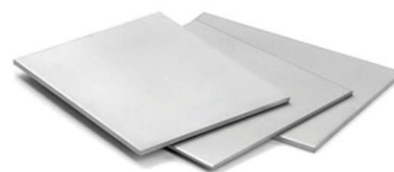

PSS

Product Code	Grade	Finish	Product Size (mm)	Description	Weight Ea (kg)
G304L – No. 1					
PSS008G304LN01+15003000	G304L	N01	8mm x 1500 x 3000	PLATE G304L N01 ASTM A240/A480	288.00
PSS010G304LN01+15003000	G304L	N01	10mm x 1500 x 3000	PLATE G304L N01 ASTM A240/A480	360.00
PSS010G304LN01+20004000	G304L	N01	10mm x 2000 x 4000	PLATE G304L N01 ASTM A240/A480	640.00
PSS010G304LN01+20006000	G304L	N01	10mm x 2000 x 6000	PLATE G304L N01 ASTM A240/A480	960.00
PSS012G304LN01+15003000	G304L	N01	12mm x 1500 x 3000	PLATE G304L N01 ASTM A240/A480	432.00
PSS012G304LN01+20004000	G304L	N01	12mm x 2000 x 4000	PLATE G304L N01 ASTM A240/A480	768.00
PSS016G304LN01+15003000	G304L	N01	16mm x 1500 x 3000	PLATE G304L N01 ASTM A240/A480	576.00
PSS016G304LN01+20004000	G304L	N01	16mm x 2000 x 4000	PLATE G304L N01 ASTM A240/A480	1024.00
PSS020G304LN01+15003000	G304L	N01	20mm x 1500 x 3000	PLATE G304L N01 ASTM A240/A480	720.00
PSS020G304LN01+20004000	G304L	N01	20mm x 2000 x 4000	PLATE G304L N01 ASTM A240/A480	1280.00
PSS025G304LN01+15003000	G304L	N01	25mm x 1500 x 3000	PLATE G304L N01 ASTM A240/A480	900.00
PSS025G304LN01+20004000	G304L	N01	25mm x 2000 x 4000	PLATE G304L N01 ASTM A240/A480	1600.00
PSS032G304LN01+15003000	G304L	N01	32mm x 1500 x 3000	PLATE G304L N01 ASTM A240/A480	1152.00
PSS032G304LN01+20004000	G304L	N01	32mm X 2000 x 4000	PLATE G304L N01 ASTM A240/A480	2048.00
PSS040G304LN01+20004000	G304L	N01	40mm X 2000 x 4000	PLATE G304L N01 ASTM A240/A480	2559.00
PSS050G304LN01+20004000	G304L	N01	50mm X 2000 x 4000	PLATE G304L N01 ASTM A240/A480	3200.00
PSS065G304LN01+20004000	G304L	N01	65mm X 2000 x 4000	PLATE G304L N01 ASTM A240/A480	4160.00

G316L – No. 1

PSS008G316LN01+15003000	G316L	N01	8mm x 1500 x 3000	PLATE G316L N01 ASTM A240/A480	288.00
PSS008G316LN01+20004000	G316L	N01	8mm x 2000 x 4000	PLATE G316L N01 ASTM A240/A480	512.00
PSS010G316LN01+15003000	G316L	N01	10mm x 1500 x 3000	PLATE G316L N01 ASTM A240/A480	360.00
PSS010G316LN01+20004000	G316L	N01	10mm x 2000 x 4000	PLATE G316L N01 ASTM A240/A480	640.00
PSS012G316LN01+15003000	G316L	N01	12mm x 1500 x 3000	PLATE G316L N01 ASTM A240/A480	432.00
PSS012G316LN01+20004000	G316L	N01	12mm x 2000 x 4000	PLATE G316L N01 ASTM A240/A480	768.00
PSS012G316LN01+20006000	G316L	N01	12mm x 2000 x 6000	PLATE G316L N01 ASTM A240/A480	1152.00
PSS016G316LN01+15003000	G316L	N01	16mm x 1500 x 3000	PLATE G316L N01 ASTM A240/A480	576.00
PSS016G316LN01+20004000	G316L	N01	16mm x 2000 x 4000	PLATE G316L N01 ASTM A240/A480	1024.00
PSS020G316LN01+15003000	G316L	N01	20mm x 1500 x 3000	PLATE G316L N01 ASTM A240/A480	720.00
PSS020G316LN01+20004000	G316L	N01	20mm x 2000 x 4000	PLATE G316L N01 ASTM A240/A480	1280.00
PSS025G316LN01+15003000	G316L	N01	25mm x 1500 x 3000	PLATE G316L N01 ASTM A240/A480	900.00
PSS025G316LN01+20004000	G316L	N01	25mm x 2000 x 4000	PLATE G316L N01 ASTM A240/A480	1600.00
PSS032G316LN01+20004000	G316L	N01	32mm x 2000 x 4000	PLATE G316L N01 ASTM A240/A480	2048.00
PSS040G316LN01+20004000	G316L	N01	40mm x 2000 x 4000	PLATE G316L N01 ASTM A240/A480	2560.00
PSS050G316LN01+20004000	G316L	N01	50mm x 2000 x 4000	PLATE G316L N01 ASTM A240/A480	3200.00
PSS065G316LN01+20004000	G316L	N01	65mm x 2000 x 4000	PLATE G316L N01 ASTM A240/A480	4160.00


Plate

Grades: 304L, 316L, 2205, 3CR12, 253MA ASTM A240/A480

Finishes: 2B LPE, 1D, No. 1, 2E

Unit of Supply: Each

Certification: Acc. to

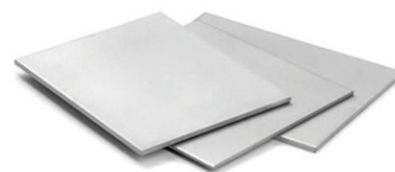

PSS

Product Code	Grade	Finish	Product Size (mm)	Description	Weight Ea (kg)
G2205 – 2E/1D					
PSS004G2205N01+20004000	G2205	2E	4mm x 2000 x 4000	PLATE G2205 2E ASTM A240/A480	256.00
PSS005G2205N01+20004000	G2205	1D	5mm x 2000 x 4000	PLATE G2205 1D ASTM A240/A480	320.00
PSS006G2205N01+20004000	G2205	1D	6mm x 2000 x 4000	PLATE G2205 1D ASTM A240/A480	384.00
PSS008G2205N01+20004000	G2205	1D	8mm x 2000 x 4000	PLATE G2205 1D ASTM A240/A480	512.00
PSS010G2205N01+20004000	G2205	1D	10mm x 2000 x 4000	PLATE G2205 1D ASTM A240/A480	640.00
PSS012G2205N01+20004000	G2205	1D	12mm x 2000 x 4000	PLATE G2205 1D ASTM A240/A480	768.00
PSS016G2205N01+20004000	G2205	1D	16mm x 2000 x 4000	PLATE G2205 1D ASTM A240/A480	1024.00
PSS020G2205N01+20004000	G2205	1D	20mm x 2000 x 4000	PLATE G2205 1D ASTM A240/A480	1280.00
PSS025G2205N01+20004000	G2205	1D	25mm x 2000 x 4000	PLATE G2205 1D ASTM A240/A480	1600.00
PSS032G2205N01+20004000	G2205	1D	32mm x 2000 x 4000	PLATE G2205 1D ASTM A240/A480	2048.00
PSS040G2205N01+20004000	G2205	1D	40mm x 2000 x 4000	PLATE G2205 1D ASTM A240/A480	2560.00
PSS050G2205N01+20004000	G2205	1D	50mm x 2000 x 4000	PLATE G2205 1D ASTM A240/A480	3200.00

G3CR12 – No. 1

SSS300G3CR12N01+15003000	G3CR12	N01	3mm x 1500 x 3000	PLATE G3CR12 N01 ASTM A240/A480	108.00
PSS005G3CR12N01+15003000	G3CR12	N01	5mm x 1500 x 3000	PLATE G3CR12 N01 ASTM A240/A480	180.00
PSS006G3CR12N01+15003000	G3CR12	N01	6mm x 1500 x 3000	PLATE G3CR12 N01 ASTM A240/A480	216.00

G253MA – 2E/1D

PSS005G253MAN01+20004000	G253MA	2E	5mm x 2000 x 4000	PLATE G253MA 2E ASTM A240/A480	320.00
PSS006G253MAN01+20004000	G253MA	1D	6mm x 2000 x 4000	PLATE G253MA 1D ASTM A240/A480	384.00
PSS008G253MAN01+20004000	G253MA	1D	8mm x 2000 x 4000	PLATE G253MA 1D ASTM A240/A480	512.00
PSS010G253MAN01+20004000	G253MA	1D	10mm x 2000 x 4000	PLATE G253MA 1D ASTM A240/A480	640.00
PSS012G253MAN01+20004000	G253MA	1D	12mm x 2000 x 4000	PLATE G253MA 1D ASTM A240/A480	768.00
PSS015G253MAN01+15003000	G253MA	1D	15mm x 1500 x 3000	PLATE G253MA 1D ASTM A240/A480	540.00
PSS020G253MAN01+15003000	G253MA	1D	20mm x 2000 x 4000	PLATE G253MA 1D ASTM A240/A480	1280.00
PSS025G253MAN01+20004000	G253MA	1D	25mm x 2000 x 4000	PLATE G253MA 1D ASTM A240/A480	1600.00


Coil

Grades: 304, 304L, 316L

Finishes: 2B, BA, No. 4

Unit of Supply: Kg

Certification: Acc. to
ASTM A240/A480



CSS

Product Code	Grade	Finish	Product Size (mm)	Description	kg/m
G304 – 2B					
CSS055G3042B+0915	G304	2B	0.55mm x 0915	COIL G304 2B ASTM A240/A480	4.02
CSS055G3042B+1219	G304	2B	0.55mm x 1219	COIL G304 2B ASTM A240/A480	5.36
CSS090G3042B+1219	G304	2B	0.90mm x 1219	COIL G304 2B ASTM A240/A480	8.78
CSS120G3042B+1219	G304	2B	1.20mm x 1219	COIL G304 2B ASTM A240/A480	11.70
CSS200G3042B+1219	G304	2B	2.00mm x 1219	COIL G304L 2B ASTM A240/A480	19.50
CSS250G3042B+1219	G304	2B	2.50mm x 1219	COIL G304L 2B ASTM A240/A480	24.38
CSS300G3042B+1219	G304	2B	3.00mm x 1219	COIL G304L 2B ASTM A240/A480	29.25
CSS090G3042BP+1219	G304	2B LPE	0.90mm x 1219	COIL G304 2B LPE ASTM A240/A480	8.78
CSS090G3042BP+1500	G304	2B LPE	0.90mm x 1500	COIL G304 2B LPE ASTM A240/A480	10.80
CSS120G3042BP+0915	G304	2B LPE	1.20mm x 0915	COIL G304 2B LPE ASTM A240/A480	8.78
CSS120G3042BP+1219	G304	2B LPE	1.20mm x 1219	COIL G304 2B LPE ASTM A240/A480	11.70
CSS120G3042BP+1500	G304	2B LPE	1.20mm x 1500	COIL G304 2B LPE ASTM A240/A480	14.40
CSS120G3042BP+1524	G304	2B LPE	1.20mm x 1524	COIL G304 2B LPE ASTM A240/A480	14.63
CSS150G3042BP+1219	G304	2B LPE	1.50mm x 1219	COIL G304 2B LPE ASTM A240/A480	14.63
CSS150G3042BP+1500	G304	2B LPE	1.50mm x 1500	COIL G304 2B LPE ASTM A240/A480	18.00
CSS200G3042BP+1219	G304L	2B LPE	2.00mm x 1219	COIL G304L 2B LPE ASTM A240/A480	19.50
CSS200G3042BP+1500	G304L	2B LPE	2.00mm x 1500	COIL G304L 2B LPE ASTM A240/A480	24.00
CSS200G304L2BP+2000	G304L	2B LPE	2.00mm x 2000	COIL G304L 2B LPE ASTM A240/A480	32.00
CSS250G3042BP+1219	G304L	2B LPE	2.50mm x 1219	COIL G304L 2B LPE ASTM A240/A480	24.38
CSS250G3042BP+1500	G304L	2B LPE	2.50mm x 1500	COIL G304L 2B LPE ASTM A240/A480	30.00
CSS250G304L2BP+2000	G304L	2B LPE	2.50mm x 2000	COIL G304L 2B LPE ASTM A240/A480	40.00
CSS300G3042BP+1219	G304L	2B LPE	3.00mm x 1219	COIL G304L 2B LPE ASTM A240/A480	29.25
CSS300G3042BP+1500	G304L	2B LPE	3.00mm x 1500	COIL G304L 2B LPE ASTM A240/A480	36.00
CSS300G304L2BP+2000	G304L	2B LPE	3.00mm x 2000	COIL G304L 2B LPE ASTM A240/A480	48.00
CSS400G304L2BP+1500	G304L	2B LPE	4.00mm x 1500	COIL G304L 2B LPE ASTM A240/A480	48.00
CSS400G304L2BP+2000	G304L	2B LPE	4.00mm x 2000	COIL G304L 2B LPE ASTM A240/A480	64.00
G304 – BA					
CSS120G304BA+0915	G304	BA LPE	1.20mm x 0915	COIL G304 BA LPE ASTM A240/A480	8.78
CSS120G304BA+1219	G304	BA LPE	1.20mm x 1219	COIL G304 BA LPE ASTM A240/A480	11.70
G304 – No. 4					
CSS120G304N04+0915	G304	N04 LPE	1.20mm x 0915	COIL G304 N04 LPE ASTM A240/A480	8.78
CSS120G304N04+1219	G304	N04 LPE	1.20mm x 1219	COIL G304 N04 LPE ASTM A240/A480	11.70
CSS120G304N04+1524	G304	N04 LPE	1.20mm x 1524	COIL G304 N04 LPE ASTM A240/A480	14.63
CSS150G304N04+0915	G304	N04 LPE	1.50mm x 0915	COIL G304 N04 LPE ASTM A240/A480	10.98
CSS150G304N04+1219	G304	N04 LPE	1.50mm x 1219	COIL G304 N04 LPE ASTM A240/A480	14.63

Coil processing up to 3mm is available in New Zealand.

Laser cutting quality film standard (100 microns).

Other grades and sizes available on request ex. mill stock or production.


Coil

Grades: 304, 304L, 316L

Finishes: 2B, BA, No. 4

Unit of Supply: Kg

Certification: Acc. to
ASTM A240/A480



CSS

Product Code	Grade	Finish	Product Size (mm)	Description	kg/m
G316L - 2B					
CSS200G316L2BP+1219	G316L	2B LPE	2.00mm x 1219	COIL G316L 2B LPE ASTM A240/A480	19.50
CSS200G316L2BP+1500	G316L	2B LPE	2.00mm x 1500	COIL G316L 2B LPE ASTM A240/A480	24.00
CSS250G316L2BP+1219	G316L	2B LPE	2.50mm x 1219	COIL G316L 2B LPE ASTM A240/A480	24.38
CSS250G316L2BP+1500	G316L	2B LPE	2.50mm x 1500	COIL G316L 2B LPE ASTM A240/A480	30.00
CSS300G316L2B+1219	G316L	2B	3.00mm x 1219	COIL G316L 2B ASTM A240/A480	29.25
CSS300G316L2BP+1219	G316L	2B LPE	3.00mm x 1219	COIL G316L 2B LPE ASTM A240/A480	29.25
CSS300G316L2BP+1500	G316L	2B LPE	3.00mm x 1500	COIL G316L 2B LPE ASTM A240/A480	36.00
CSS400G316L2BP+1500	G316L	2B LPE	4.00mm x 1500	COIL G316L 2B LPE ASTM A240/A480	48.00

Cut-to-length options available in New Zealand or offshore.

Coil processing up to 3mm is available in New Zealand.


Laser cutting quality film standard (100 microns).

Other grades and sizes available on request ex. mill stock or production.

Tread / Tear Plates

Grades: 304
Finishes: No. 1

Unit of Supply: Each
Certification: Acc. to
ASTM A240/A480



HRAP Pattern B and Pressed Types

Stainless Steel is the standard for floor plates for use in galley spaces, washrooms, engine rooms and machinery spaces, platforms, deck and ladder treads.

PCS

Product Code	Product Size (mm)	Description	Weight Ea (kg)
PCS0031G304N01+12502500	3.1mm x 1250 x 2500	PLATE CHEQUER G304 HR N01 - ASTM A793 Pattern B	77.50
PCS0031G304N01+12503000	3.1mm x 1250 x 3000	PLATE CHEQUER G304 HR N01 - ASTM A793 Pattern B	93.00
PCS0047G304N01+12502500	4.76mm x 1250 x 2500	PLATE CHEQUER G304 HR N01 - ASTM A793 Pattern B	119.00
PCS0047G304N01+15243048	4.76mm x 1524 x 3048	PLATE CHEQUER G304 HR N01 - ASTM A793 Pattern B	177.00


Tear*

Length mm	Width mm	Thickness mm [°]
25 - 32	6 - 10	1 - 2

* the dimensions and the mass are indicative

° the thickness of the tear depends on the thickness of the plate

+ thickness on request




HRAP Pattern B



Pressed
(Available on Indent)

Profiling and Polishing Service

Vulcan Stainless offers you the most comprehensive service for profile cutting and polishing stainless steel sheet and plate in New Zealand.

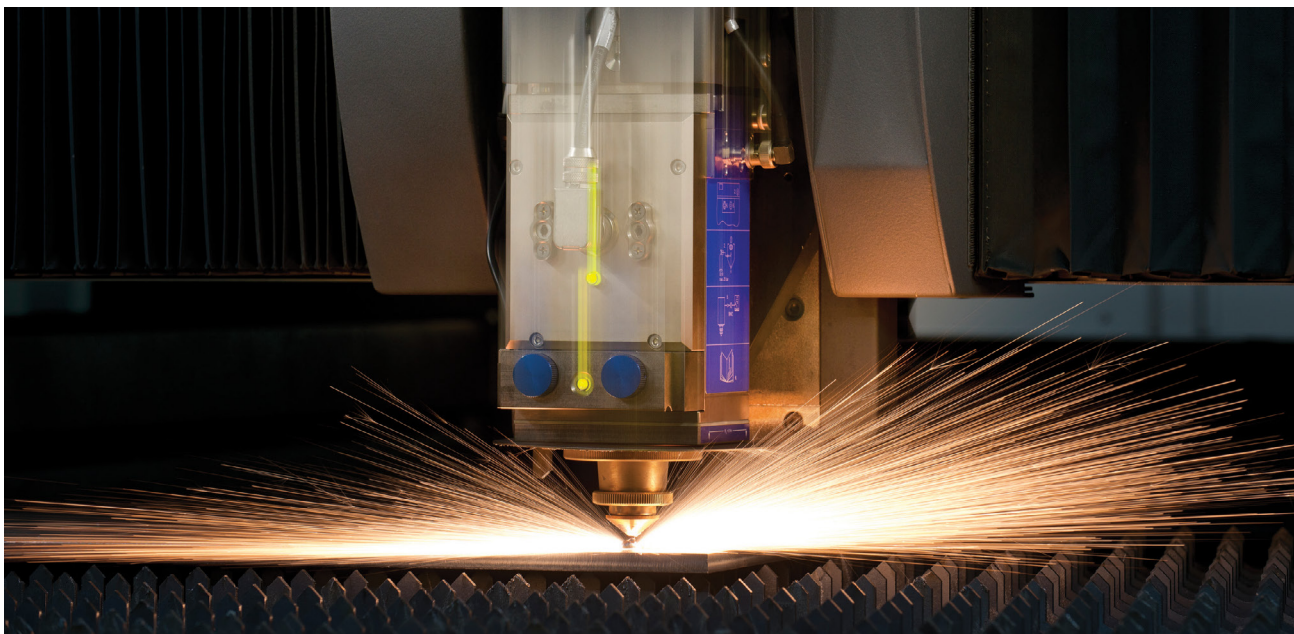

Options include

- Laser cutting for high accuracy and precision
- Plasma cutting for large pieces or thicknesses

We can accommodate virtually any configuration specified. Additionally with our in-house polishing service, the resulting components can be polished to a high lustre for exceptional presentation.

Components can also be supplied PE coated for protection.

With dedicated profiling teams based in Auckland and Christchurch, there is no job too small or large for us to handle.

Benefits for you

- Two workshops 100% dedicated to stainless steel so less potential for contamination issues
- Very diverse range of stainless steel grades and plate sizes to meet a wide variety of applications (standard, high temperature, duplex and special purpose grades)
- Cutting options for stainless plate and sheet from 0.55 mm up to 65 mm
- North Island and South Island cutting operations
- Full material traceability including heat numbers recorded on all customer orders, and Supplier Material Certificates are available on request
- Random spot checks on stock utilising our X-ray Fluorescence Metal Analyser confirms alloy composition
- No drawing charges for standard components (rectangles, disks, flanges)
- DXF, DWG & AutoCAD drawing formats all accepted

Laser Cutting Services

Our 6 kW large format Laser Profiling Machine's 3,000 x 6,000mm table capacity allows for... larger size flexibility and greater productivity!




Laser cutting can often eliminate the need for post-machining on many engineering jobs, enabling you to reduce your manufacturing costs considerably. The process is extremely accurate and uses less energy – helping to eliminate or reduce distortion. Additionally, with our large format capacity, the potential to reduce sheets used on a job, and thus welding time, offers considerable cost-savings and when multiple items are required, they can be nested across fewer sheets allowing better efficiency – faster speed of delivery.

The levels of precision and edge quality achievable with laser cutting is far superior to traditional cutting methods, enabling us to cut complex shapes and very small holes.


- Large bed capacity (3,000 mm x 6,000 mm)
- Scratch-free one-side only is typically offered (due to the nature of the metal bed that the plates are nested on)
- High accuracy, precision cutting
- Repeatability – intricate pieces with slots, holes, angles, or detailed patterns can be created over and over to the same specifications
- Ideal for complicated shapes
- CAD/CAM component nesting for most economic use of material
- Laser etching on components can be done to improve customer efficiencies in areas such as: illustrating folding lines, part numbers, critical customer information, etc

Thickness (mm)	Smallest Ø Hole (mm)
25	11.0
20	9.0
16	4.5
12	3.75
10	2.5
8	2.0
6	1.5
5	1.25
4	1.0
3	0.75
2	0.5

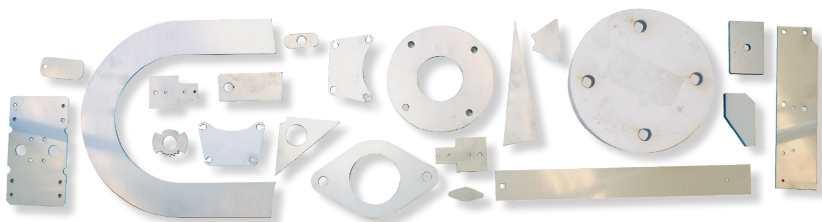

Plasma Cutting Services

- Hypertherm high definition plasma cutting machine
- 76 mm max. cutting thickness
- Large bed capacity (3,000 mm x 6,800 mm)
- C.N.C. operated
- Underwater cutting for less heat distortion
- During the plasma cutting process, a chamfered cut is created... thus allowances need to be made for parts that need additional machining. Machining allowances need to be CLEARLY stated on placement of order!
- An in-house edge deburring service is provided

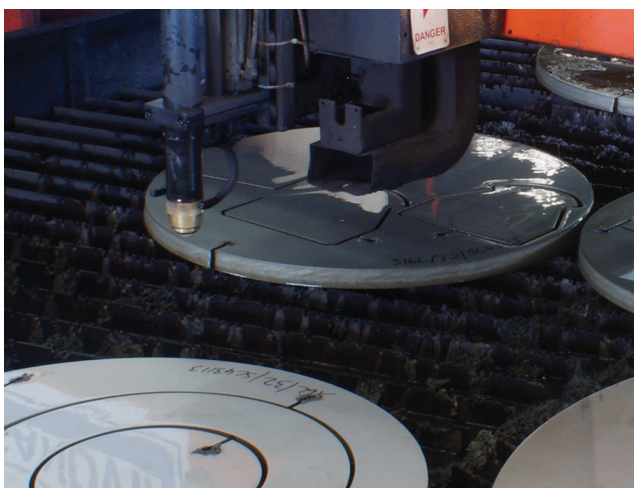

Thickness (mm)	Smallest Ø Hole (mm)	Recommended Machining Allowance (mm)
76	120	15
65	120	15
50	100	10
40	75	10
32	55	7
25	45	6
20	45	6
16	35	6
12	25	5
10	25	5
8	25	5

Polishing Service

- One custom-built dry polishing machine
- Polishes plate and profile cut components
- Flat Bar polishing available (outsourced)
- No. 4 / 240 grit polish standard ($R_a < 0.8\mu\text{m}$)
- Suitable for polishing No. 1 (mill finish) and 2B components from 3.0 mm to 76 mm thickness
- Maximum plate size 2,000 mm x 6,000 mm



Coil Slitting and Cut-to-length Service

To meet customers’ specific requirements, Vulcan Stainless routinely out-sources this specialist process via both local and international production facilities.



Sheetmetal Standard Sizing

Gauge No.	mm	Imperial (ft)	Metric (mm)
10	3.00	8 x 3	2438 x 0915
12	2.50	8 x 4	2438 x 1219
14	2.00	10 x 3	3048 x 0915
16	1.50	10 x 4	3048 x 1219
18	1.20	10 x 5	3048 x 1524
20	0.90	12 x 3	3658 x 0915
22	0.70	12 x 4	3658 x 1219
24	0.55		
26	0.45		

Surface Finishes

For plate, sheet, coil and strip


When ordering, it is important to specify surface finish to ensure it is appropriate for the application, even when appearance is not a factor.

Surface finishes can improve, or impair, corrosion resistance depending on the environment in which it is used. There are many finishes that can be used – mill, ground, brushed, polished, bead blasted, electropolished, coloured and patterned

Surface finishes for stainless steel sheet, coil, strip and plates are defined in standards ASTM A480 / A480M – 10 (tables 11 and 13) and BS EN 10088-2 (table 6) which uses a coding system for ex mill finishes – (1) for hot rolled (HR), (2) for cold rolled (CR), and “special finishes” to achieve specific aesthetic effects.

A ‘special finish’ usually involves close consultation with specialist finishers, as surface characteristics can vary, and the final acceptance of special finishes is often done by using agreed reference or control standard samples.

The definitions of surface finish do not express surface roughness achieved in terms of Ra values, however included in the below table is an indication of average Ra values where available.

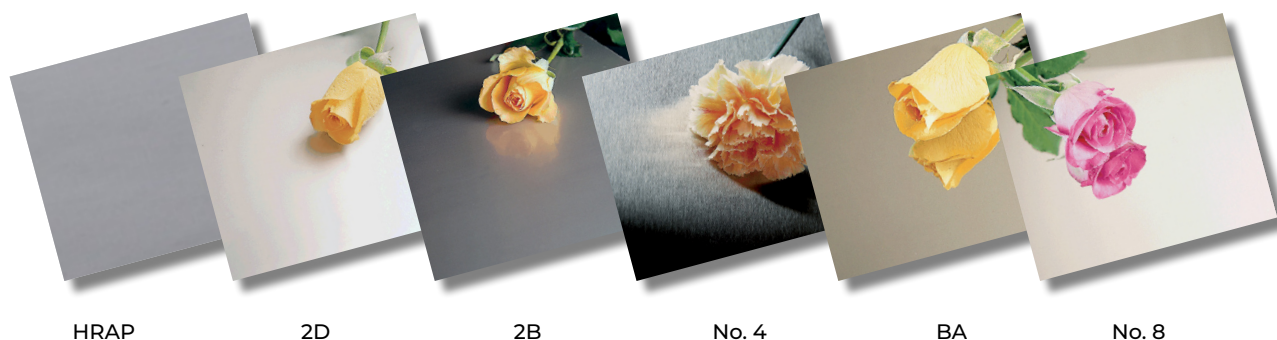

Most common standard mill finishes

Finish No.		Typical surface Ra (micrometres μm)*	Production route / remarks
ASTM A480	EN 10088-2		
0	1C	-	HR or CR, annealed, mill scale not removed, scale impairs corrosion resistance, generally used for heat resisting applications
1	1D	4.0 - 7.0	HR, annealed, pickled (descaled), used for corrosion and heat resisting applications
1	1E		HR, heat treated, mechanically descaled
-	1U		HR, not heat treated, not descaled
2D	2D	0.4 - 2.0	CR, annealed, pickled (descaled), matt, non-reflective finish
2E	2E	0.4 - 2.0	CR, annealed, surface blasted and pickled, after cold rolling, matt, non-reflective finish
2B	2B	0.1 - 0.5	HR, annealed, descaled, cold rolled, skin passed, most commonly used sheet and coil finish, bright, moderately reflective surface
-	2C		CR, heat treated, not descaled
No.4	No.4	0.2 - 1.0	CR, annealed, pickled (descaled), most common polished finish for catering and dairy equipment, grit polished to approximately 120 – 150 mesh
BA	2R	0.05 - 0.1	CR, bright annealed (in protective atmosphere), high reflective mirror-like appearance, but with some “miliness” and not as reflective as No. 8 finish
No.8	2P	< 0.1	CR, annealed, pickled (descaled), mirror polished with very fine buffing rouges, the most reflective finish commonly produced on sheet (even finer finish is super or ultra No. 8)
No.3	2G	-	CR, annealed, pickled (descaled), ground polished with specified grit one side only, unidirectional texture, not very reflective
No.6	2K	< 0.5	CR, annealed, pickled (descaled), finer satin polished, clean cut surface to achieve improved corrosion resistance for marine and architectural applications

* Ra in micrometres (formerly microns) NOTE: specifications do not guarantee a Ra value range.